

Mullard

DIRECTLY HEATED RECTIFIER


AZ1

Filament	V_f	=	4.0 V
	I_f	=	1.1 V

Limiting Values

V_a max	2 x 500 V
I_a max	60 mA
V_a max	2 x 400 V
I_a max	75 mA
V_a max	2 x 300 V
I_a max	100 mA

Arrangement of electrodes and base connections.

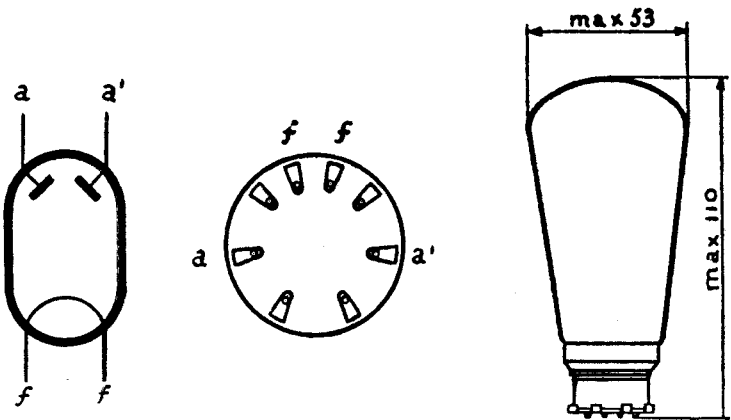

AZ1

AZ1

Mullard DIRECTLY HEATED RECTIFIER

