

MBR735 THRU MBR7200

SCHOTTKY BARRIER RECTIFIER



REVERSE VOLTAGE: 35 to 200 VOLTS
FORWARD CURRENT: 7.5 AMPERE

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- For use in low voltage, high frequency inverters, free whelling, and polarity protection applications
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case

MECHANICAL DATA

Case: Molded plastic, TO-220A


Epoxy: UL 94V-0 rate flame retardant

Terminals: Leads solderable per MIL-STD-202 method 208 guaranteed

Polarity: As marked

Mounting position: Any

Weight: 0.08ounce, 2.24gram

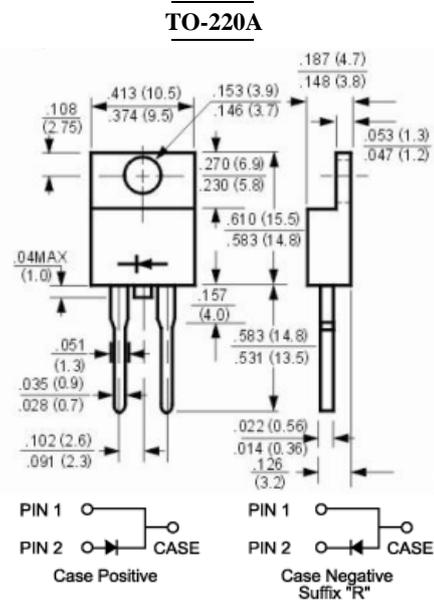

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	MBR735	MBR745	MBR750	MBR760	MBR780	MBR7100	MBR7150	MBR7200	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	35	45	50	60	80	100	150	200	Volts
Maximum RMS Voltage	V_{RMS}	24	31	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	V_{DC}	35	45	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	7.5								Amp
Peak repetitive forward current (sq. wave, 20 KHz) at $T_C = 105^\circ\text{C}$	I_{FRM}	15.0								Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	150								Amp
Maximum Forward Voltage (Note 1)	V_F	at $I_F = 7.5\text{A}$, $T_C = 25^\circ\text{C}$	0.70	0.80	0.85	0.95				
		at $I_F = 7.5\text{A}$, $T_C = 125^\circ\text{C}$	0.57	0.65	0.72	0.92				
		at $I_F = 15\text{A}$, $T_C = 25^\circ\text{C}$	0.84	-	-	-				
		at $I_F = 15\text{A}$, $T_C = 125^\circ\text{C}$	0.72	-	-	-				
Typical Thermal Resistance	$R_{\theta JC}$	3.0								°C/W
Typical Junction Capacitance (Note 1)	C_J	360	280	200	160					pF
Operating Temperature Range	T_J	-55 to +150								°C
Storage Temperature Range	T_{stg}	-55 to +150								°C

NOTES:

1- Pulse test: 300µs pulse width, 1% duty cycle

MBR735 THRU MBR7200

SCHOTTKY BARRIER RECTIFIER

RATINGS AND CHARACTERISTIC CURVES

FIG.1- FORWARD CURRENT DERATING CURVE

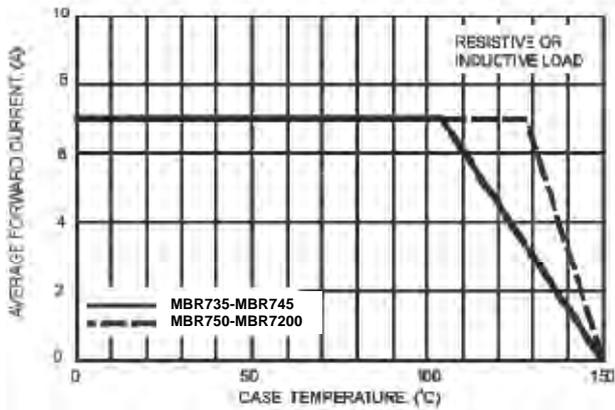


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

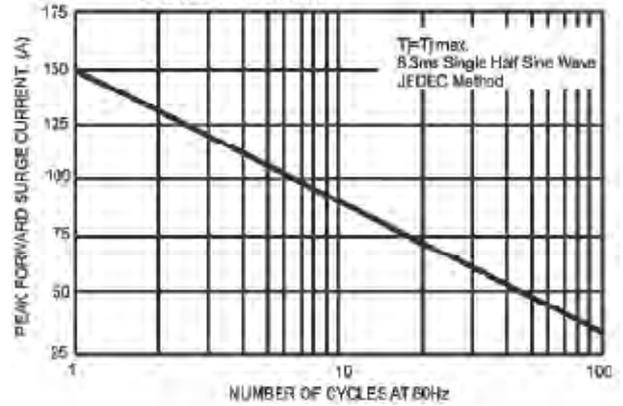


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

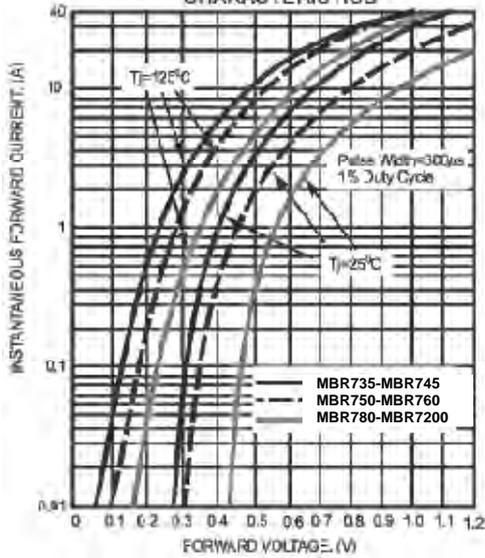


FIG.4- TYPICAL REVERSE CHARACTERISTICS

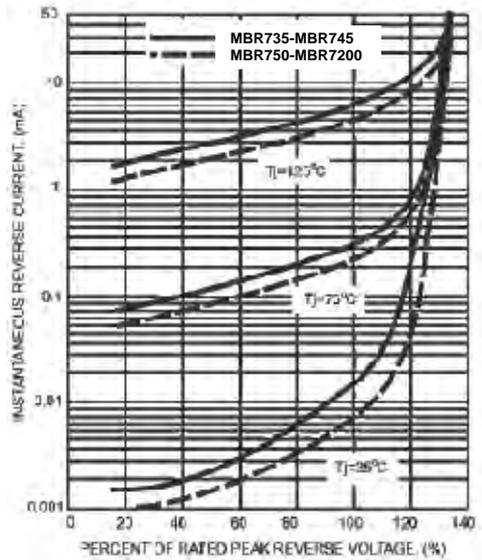


FIG.5- TYPICAL JUNCTION CAPACITANCE

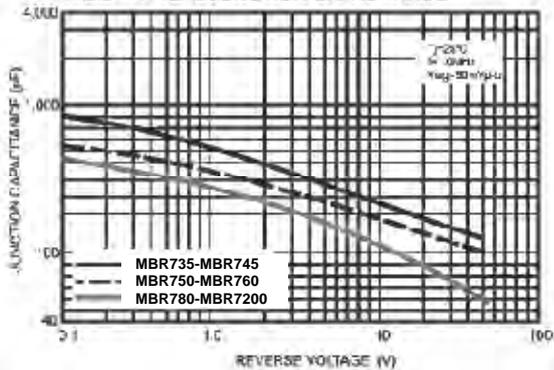


FIG.6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

