

Silicon NPN Power Transistors

BDX65B

DESCRIPTION


- With TO-3 package
- DARLINGTON
- Complement to type BDX64B

APPLICATIONS

- Designed for power amplification and switching applications.

PINNING (See Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

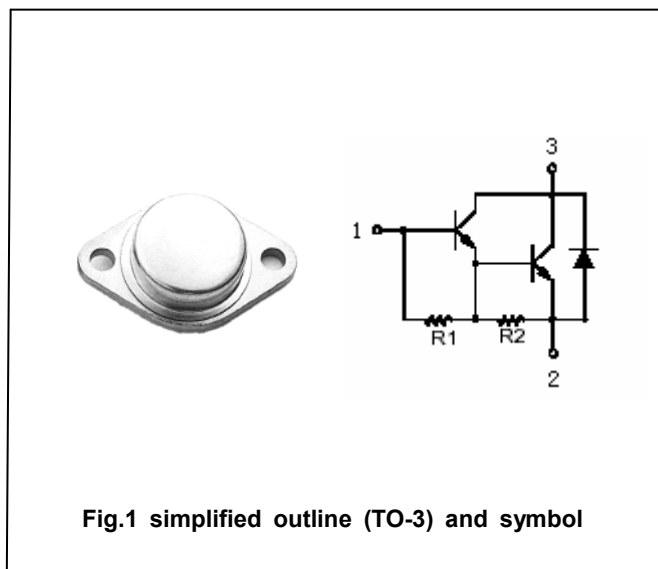Absolute maximum ratings($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	120	V
V_{CEO}	Collector-emitter voltage	Open base	100	V
V_{EBO}	Emitter-base voltage	Open collector	5	V
I_C	Collector current		12	A
I_{CM}	Collector current(peak)		16	A
I_B	Base current		0.2	A
P_T	Total power dissipation	$T_C=25^\circ\text{C}$	117	W
T_j	Junction temperature		-55~200	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~200	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal resistance from junction to case	1.5	$^\circ\text{C}/\text{W}$

Silicon NPN Power Transistors

BDX65B

CHARACTERISTICS

www.datasheet4u.com

 $T_j = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEQ(SUS)}$	Collector-emitter sustaining voltage	$I_C = 0.1\text{A}$; $I_B = 0$; $L = 25\text{mH}$	100			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C = 5\text{A}$; $I_B = 20\text{mA}$			2	V
V_{BE}	Base-emitter on voltage	$I_C = 5\text{A}$; $V_{CE} = 3\text{V}$			3	V
I_{CBO}	Collector cut-off current	$V_{CB} = 100\text{V}$; $I_E = 0$ $T_C = 150^\circ\text{C}$			0.4 3	mA
I_{CEO}	Collector cut-off current	$V_{CE} = 50\text{V}$; $I_B = 0$			1	mA
I_{EBO}	Emitter cut-off current	$V_{EB} = 5\text{V}$; $I_C = 0$			5	mA
V_F	Diode forward voltage	$I_F = 3\text{A}$		1.8		V
h_{FE-1}	DC current gain	$I_C = 1\text{A}$; $V_{CE} = 3\text{V}$		1500		
h_{FE-2}	DC current gain	$I_C = 5\text{A}$; $V_{CE} = 3\text{V}$	1000			
h_{FE-3}	DC current gain	$I_C = 10\text{A}$; $V_{CE} = 3\text{V}$		1500		
f_T	Transition frequency	$I_C = 5\text{A}$; $V_{CE} = 3\text{V}$		7		MHz

Silicon NPN Power Transistors

BDX65B

PACKAGE OUTLINE

www.datasheet4u.com

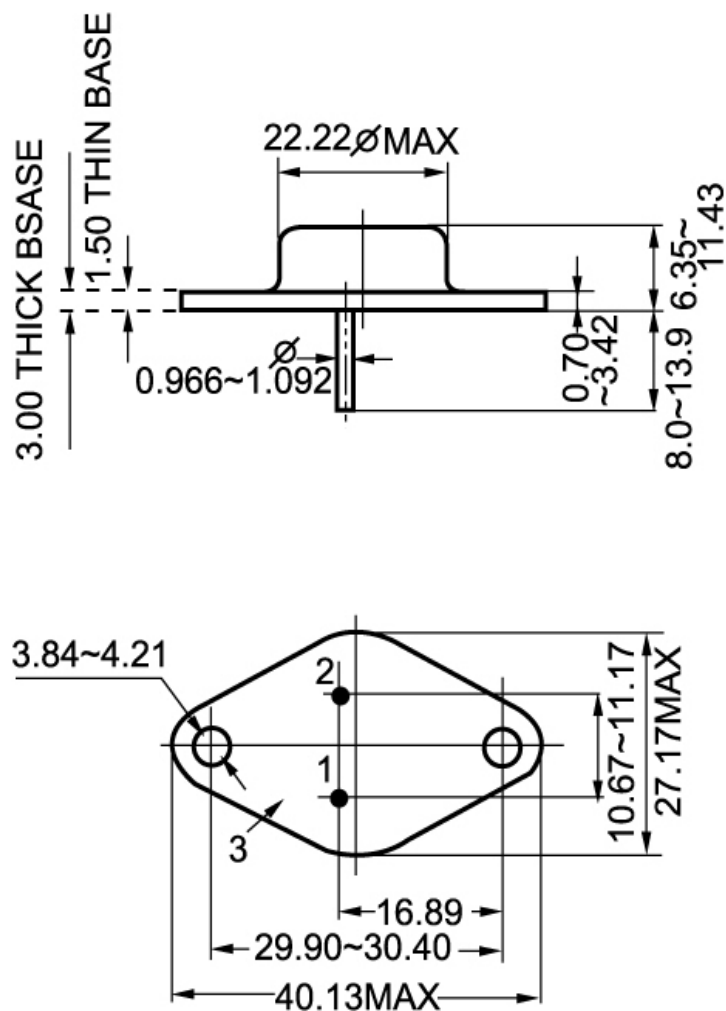


Fig.2 Outline dimensions