

■ General Description

The AME8852A family of positive, CMOS linear regulators provide low dropout voltage(110mV@150mA), low quiescent current, and low noise CMOS LDO. These rugged devices have both Thermal Shutdown, and Current limit to prevent device failure under the "Worst" of operating conditions.


■ Features

- Low Dropout Voltage: 110mV@150mA
- Guaranteed Current: 150mA
- Quiescent Current: 60μA (typ.)
- Over-Temperature Shutdown
- Current Limiting protection
- PSRR: 60dB@10KHz
- Ultra-Low-Noise: 100μV_{RMS} at 1Hz to 100KHz
- Low Temperature Coefficient
- Input Voltage Range: 2.5V~5.5V
- Output Voltage Range: 0.8V~4.3V
- Green Products Meet RoHS Standards


■ Applications

- Instrumentation
- Portable Electronics
- Wireless Devices
- Cordless Phones
- PC Peripherals
- Battery Powered Widgets

■ Typical Application

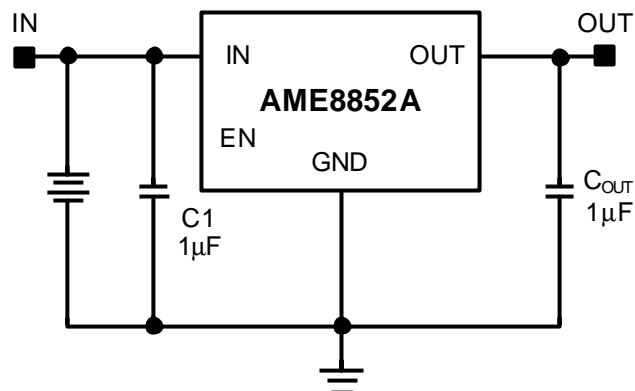


■ Functional Block Diagram

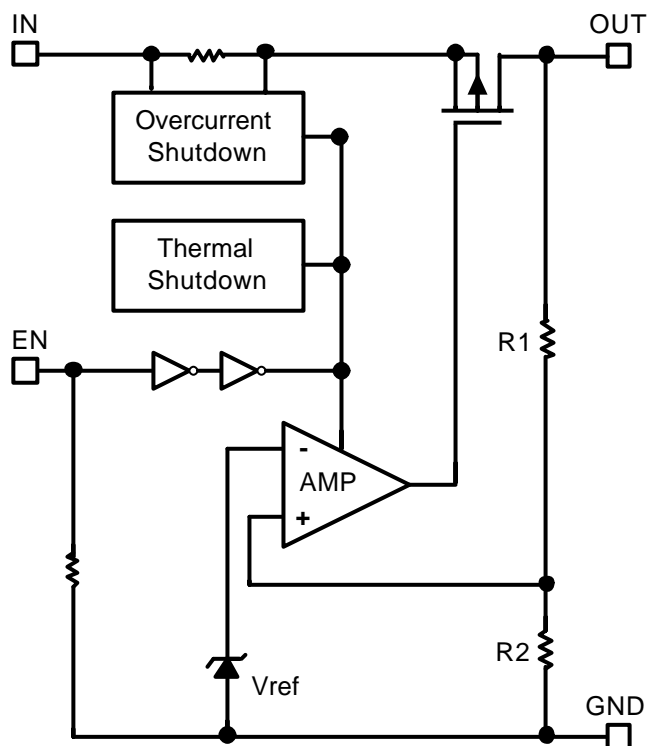

■ Pin Configuration

3 Pin

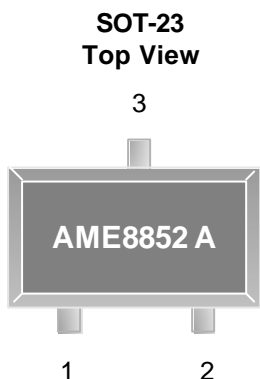


AME8852-AETxxx

1. GND
2. OUT
3. IN

*** Die Attach:
Non-Conductive Epoxy**

4 Pin

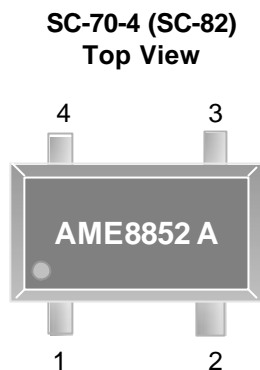


AME8852-AIUxxx

1. EN
2. GND
3. OUT
4. IN

*** Die Attach:
Conductive Epoxy**


5 Pin

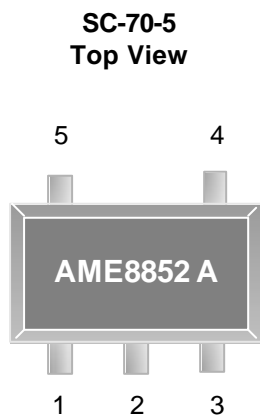

AME8852-AIVxxx

1. IN
2. GND
3. EN
4. NC
5. OUT

*** Die Attach:
Conductive Epoxy**

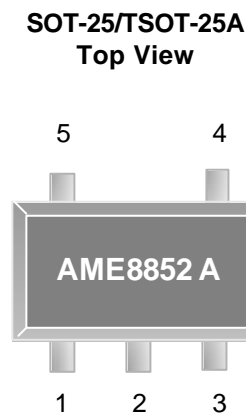

AME8852-AEVxxx

1. IN
2. GND
3. EN
4. NC
5. OUT

*** Die Attach:
Conductive Epoxy**


AME8852A

■ Pin Description

Pin Number			Pin Name	Pin Description
SOT-23	SC-70-4 (SC-82)	SC-70-5 / SOT-25 / TSOT-25A		
N/A	1	3	EN	Enable pin, Active “high”. When pulled “low”, the PMOS pass transistor turns off, current consuming less than 1μA. When EN pin floating outside, it's weakly pulled low by internal small current source .
N/A	N/A	4	NC	No connection.
1	2	2	GND	Ground connection pin.
2	3	5	OUT	LDO voltage regulator output pin; should be decoupled with a 1μF or greater capacitor.
3	4	1	IN	Input voltage pin; should be decoupled with 1μF or greater capacitor.

AME8852A

■ Ordering Information

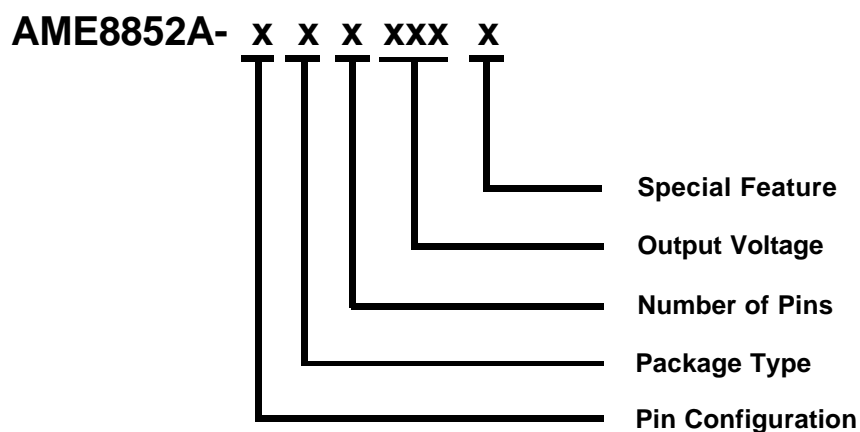

Pin Configuration	Package Type	Number of Pins	Output Voltage	Special Feature
A (SC-70-4) 1. EN 2. GND 3. OUT 4. IN	E: SOT-2X I: SC-70 (SC-82)	T: 3 U: 4 V: 5	080: 0.8V 090: 0.9V 100: 1.0V 110: 1.1V 120: 1.2V 130: 1.3V 140: 1.4V 150: 1.5V : : : : 420: 4.2V 430: 4.3V	N/A: SOT-2X K: 0.9mm max height (for TSOT-2XA Only)
A (SC-70-5) 1. IN 2. GND 3. EN 4. NC 5.OUT				
A (SOT-25) (TSOT-25A) 1. IN 2. GND 3. EN 4. NC 5. OUT				
A (SOT-23) 1. GND 2. OUT 3. IN				

AME8852A
■ Absolute Maximum Ratings

Parameter		Maximum	Unit
Input Voltage		-0.3 to 6	V
Output Current		$P_D/(V_{IN}-V_{OUT})$	mA
Output Voltage		GND-0.3 to $V_{IN}+0.3$	V
ESD Classification	HBM	2	kV
	MM	200	V

■ Recommended Operating Conditions

Parameter	Symbol	Rating	Unit
Ambient Temperature Range	T_A	- 40 to +85	°C
Junction Temperature Range	T_J	- 40 to +125	°C
Storage Temperature Range	T_{STG}	- 65 to +150	°C

■ Thermal Information

Parameter	Package	Die Attach	Symbol	Maximum	Unit
Thermal Resistance* (Junction to Case)	SC-70-5	Conductive Epoxy	θ_{JC}	224	°C / W
	SC-70-4(SC-82)				
	SOT-25			81	
	TSOT-25A			81	
	SOT-23	Non-Conductive Epoxy		140	
Thermal Resistance (Junction to Ambient)	SC-70-5	Conductive Epoxy	θ_{JA}	331	°C / W
	SC-70-4(SC-82)				
	SOT-25			260	
	TSOT-25A			230	
	SOT-23	Non-Conductive Epoxy		280	
Internal Power Dissipation	SC-70-5	Conductive Epoxy	P_D	300	mW
	SC-70-4(SC-82)				
	SOT-25			400	
	TSOT-25A			455	
	SOT-23	Non-Conductive Epoxy		400	
Lead Temperature (Soldering, 10Sec.)**				260	°C

* Measure θ_{JC} on backside center of molding compound if IC has no tab.

** MIL-STD-202G 210F

AME8852A

■ Electrical Specifications

$V_{IN}=V_{OUT(NOM)}+1V$, (for $V_{OUT}<2V$, $V_{IN}=2.5V$), $I_{OUT}=1mA$, and $C_{OUT}=1\mu F$, $C_{IN}=1\mu F$ unless otherwise noted.
Typical values are at $T_A=25^\circ C$.

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Input Voltage	V_{IN}		2.5		5.5	V
Output Accuracy	$V_{OUT,ACC}$	$I_{OUT}=1mA$	-2.0		2.0	%
Output Voltage Range	V_{OUT}		0.8		4.3	V
Dropout Voltage (Note 1)	V_{DROP}	$I_{OUT}=150mA$, $0.8V \leq V_{OUT(NOM)} \leq 1.9V$			Note2	mV
		$I_{OUT}=150mA$, $1.9V < V_{OUT(NOM)} \leq 2.4V$			400	
		$I_{OUT}=150mA$, $2.4V < V_{OUT(NOM)} \leq 2.8V$			300	
		$I_{OUT}=150mA$, $2.8V < V_{OUT(NOM)}$		110	230	
Output Current	I_{OUT}		150			mA
Quiescent Current	I_Q	$I_{OUT}=0mA$		60	90	μA
Line Regulation $\frac{\Delta V_{OUT}}{\Delta V_{IN}} \times 100\%$	REG_{LINE}	$I_{OUT}=1mA$, $0.8V \leq V_{OUT} \leq 1.2V$, $2.5V \leq V_{IN} \leq 3.5V$		0.125	0.25	% / V
		$I_{OUT}=1mA$, $1.2V < V_{OUT} \leq 2.0V$, $2.5V \leq V_{IN} \leq 3.5V$		0.1	0.2	
		$I_{OUT}=1mA$, $2.0V < V_{OUT} \leq 4.2V$, $V_{IN(MIN)} \leq V_{IN} \leq V_{IN(MIN)}+1V$		0.05	0.1	
		$I_{OUT}=1mA$, $4.2V < V_{OUT} \leq 4.5V$, $V_{IN(MIN)} \leq V_{IN} \leq 5.5V$		0.05	0.1	
Load Regulation $\frac{\Delta V_{OUT}}{\Delta I_{OUT}} \times 100\%$	REG_{LOAD}	$1mA \leq I_{OUT} \leq 150mA$ $0.8V \leq V_{OUT(NOM)} \leq 1.2V$		2.5	5	% / A
		$1mA \leq I_{OUT} \leq 150mA$ $1.2V \leq V_{OUT(NOM)} \leq 2.0V$		1.7	4	
		$1mA \leq I_{OUT} \leq 150mA$ $2.0V < V_{OUT(NOM)}$		1.0	3	

AME8852A

■ Electrical Specifications

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Power Supply Rejection Ratio	PSRR	$C_{OUT}=1\mu F$, $V_{OUT}=1V$ $I_{OUT}=10mA$ $V_{IN}=2.8V$	$F=100Hz$	60		dB
			$F=1KHz$	60		
			$F=10KHz$	60		
Output Voltage Noise	eN	$I_{OUT}=10mA$, $V_{OUT}=0.8V$, $f=1Hz$ to $100KHz$		100		μV_{RMS}
Enable High(enabled)	$V_{EN,HI}$	$V_{IN(MIN)}$ V_{IN} 5.5V	1.4		V_{IN}	V
Enable Low (shutdown)	$V_{EN,LO}$	$V_{IN(MIN)}$ V_{IN} 5.5V	0		0.4	
Enable Input Bias Current	$I_{EN,HI}$	$V_{EN}=V_{IN}$			8	μA
	$I_{EN,LO}$	$V_{EN}=0V$			1	
Shutdown Current	I_{SHDN}	$V_{IN}=5.0V$, $V_{EN}=0V$		0.1	1	μA
Shutdown Output Voltage	$V_{OUT,SD}$	$I_{OUT}=0.4mA$, $V_{EN}=0$			0.4	V
Protection						
Output Current Limit	I_{LIM}	$V_{OUT}=0.9 \times V_{OUT(NOM)}$	250			mA
Thermal Shutdown Temperature	T_{SHDN}	Shutdown, temperature increasing		150		$^{\circ}C$
Thermal Shutdown Hysteresis	$T_{SHDN(HYS)}$			20		

Note1: Dropout Voltage is measured at $V_{OUT}=V_{OUT(NOM)} \times 98\%$

Note2: For V_{OUT} below 2.0V, Dropout Voltage is the input_(MIN) to output differential.

■ Detailed Description

The AME8852A family of CMOS regulators contain a PMOS pass transistor, voltage reference, error amplifier, over-current protection, thermal shutdown, and Power Good detection circuitry.

The P-channel pass transistor receives data from the error amplifier, over-current shutdown, and thermal protection circuits. During normal operation, the error amplifier compares the output voltage to a precision reference. Over-current and Thermal shutdown circuits become active when the junction temperature exceeds 150°C, or the current exceeds 150mA. During thermal shutdown, the output voltage remains low. Normal operation is restored when the junction temperature drops more 20°C.

Capacitor Selection and Regulator Stability

The AME8852A is stable with an output capacitor to ground of 1μF or greater. Ceramic capacitors have the lowest ESR, and will offer the best AC performance. Conversely, Aluminum Electrolytic capacitors exhibit the highest ESR, resulting in the poorest AC response. Unfortunately, large value ceramic capacitors are comparatively expensive. One option is to parallel a 0.1μF ceramic capacitor with a 10μF Aluminum Electrolytic. The benefit is low ESR, high capacitance, and low overall cost.

A second capacitor is recommended between the input and ground to stabilize V_{IN} . The input capacitor should be at least 0.1μF to have a beneficial effect.

Enable Pin

The Enable Pin is pull-low. When activated pulled low, the MOS pass transistor shuts off, and all internal circuits are powered down. In this state, the stand by current is than 1μA.

Capacitor Selection and Regulator Stability

The maximum output power of the AME8852 is limited by the maximum power dissipation of the package. By calculation the power dissipation of the package as a function of the input voltage, output voltage and output current, the maximum input voltage can be obtained. The maximum power dissipation should not exceed the package' s maximum power rating.

$$P_{MAX} = (V_{IN(MAX)} - V_{OUT}) \times I_{OUT}$$


Where:

$V_{IN(MAX)}$ = maximum input voltage


P_{MAX} = maximum power dissipation of the package

■ Characterization Curve


Output Voltage

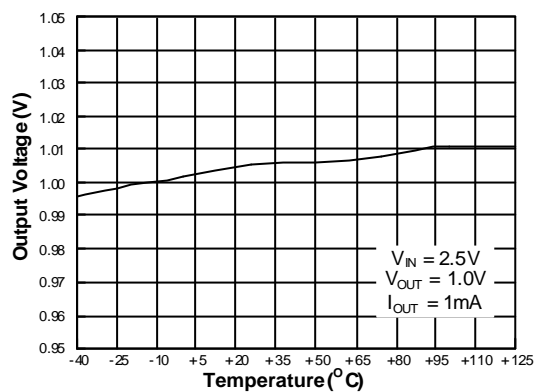


Output Voltage

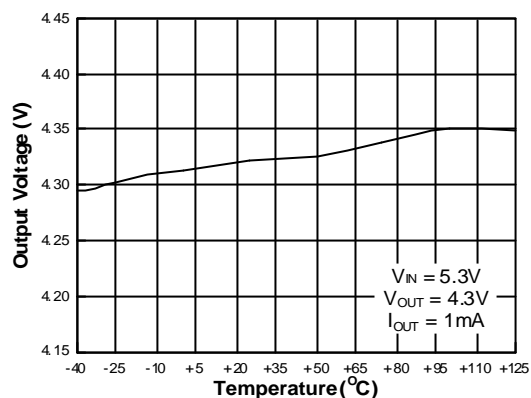






Quiescent Current

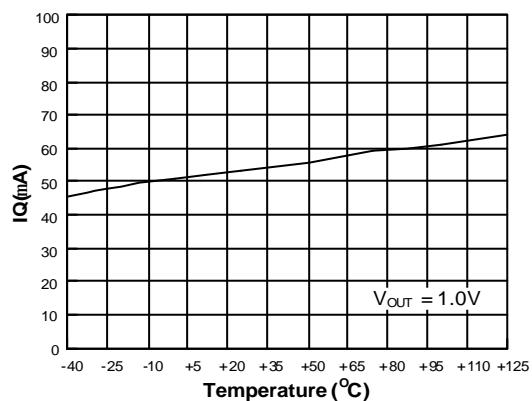

Quiescent Current

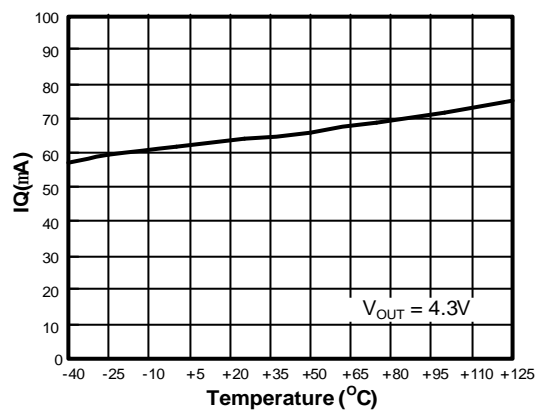


■ Characterization Curve (Contd.)

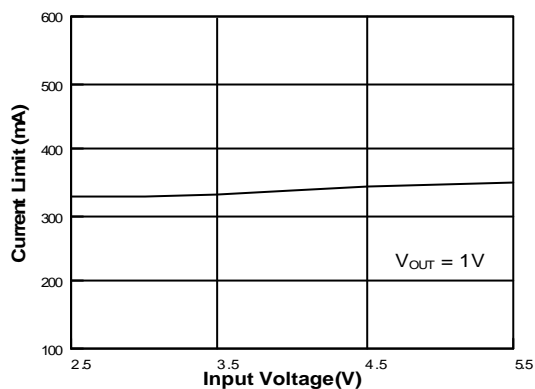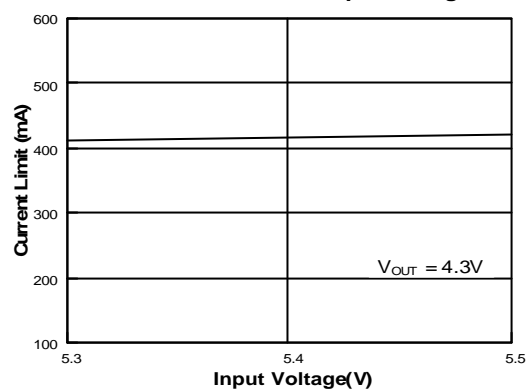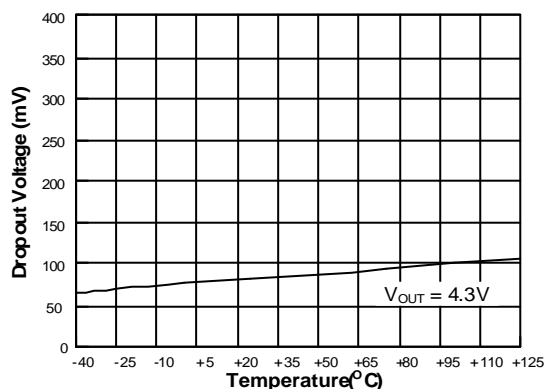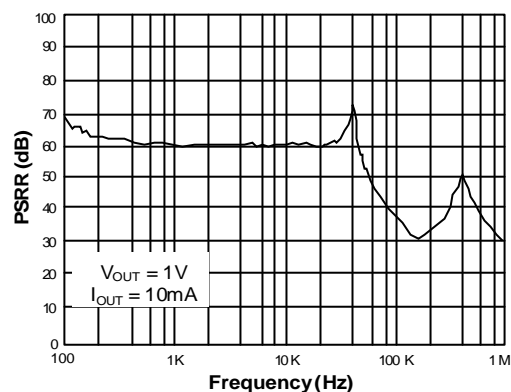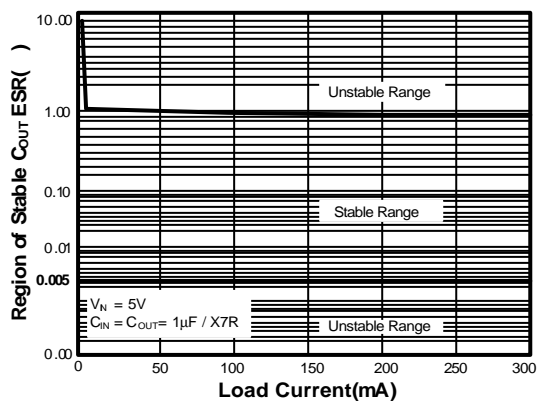
Current Limit vs. Input Voltage

Current Limit vs. Input Voltage

Dropout Voltage

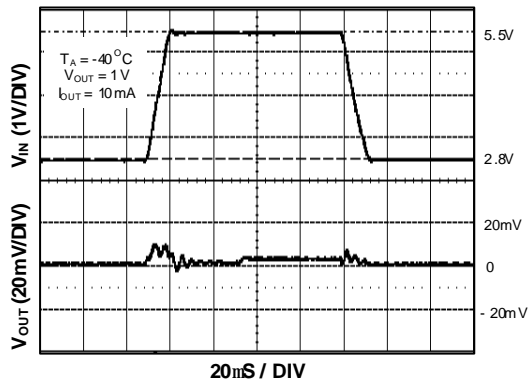PSRR vs. Frequency

Stability vs. ESR vs. Load Current

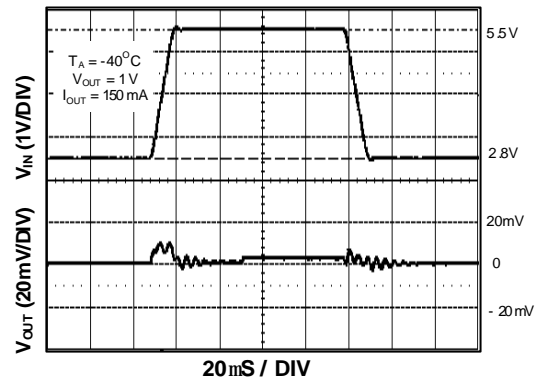
■ Characterization Curve (Contd.)


Line Transient Response




Line Transient Response




Line Transient Response

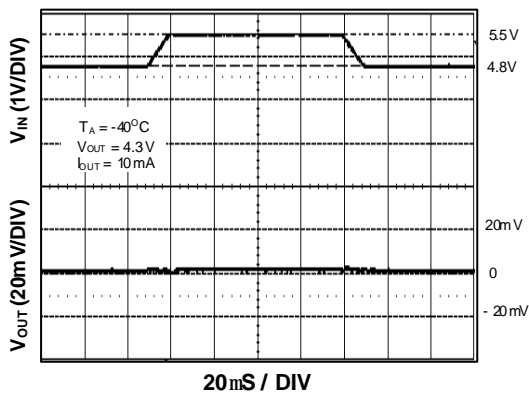


Line Transient Response

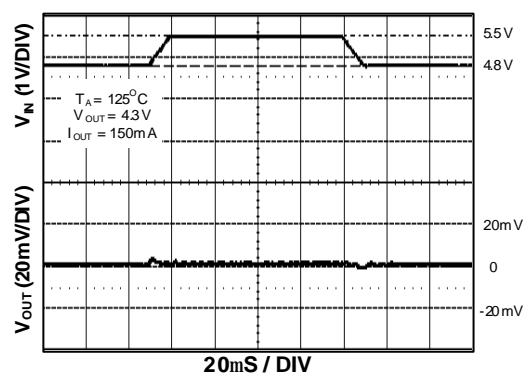







Line Transient Response






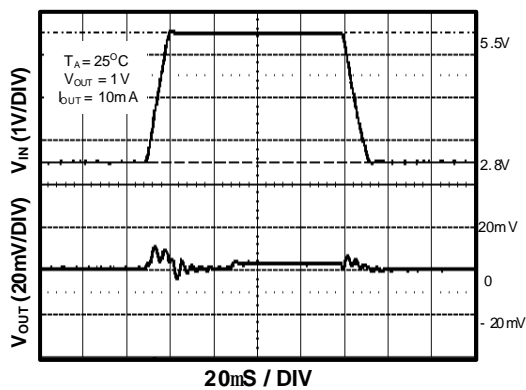


Line Transient Response

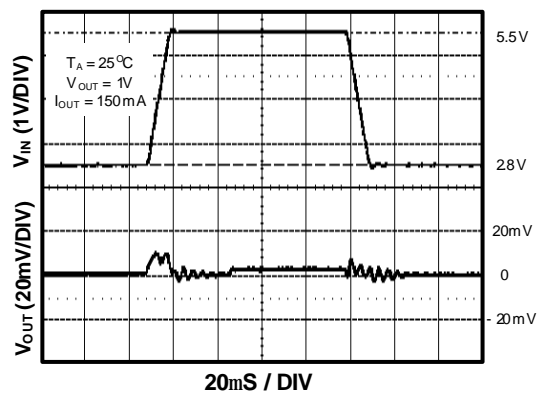


■ Characterization Curve (Contd.)

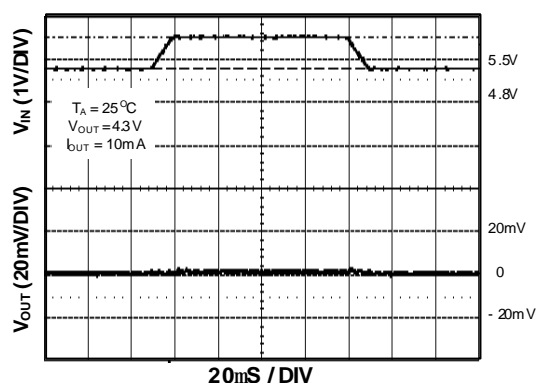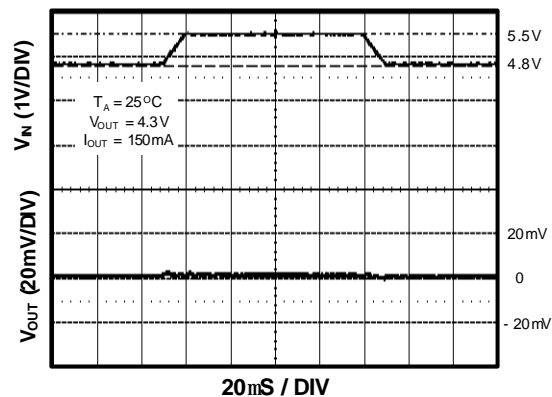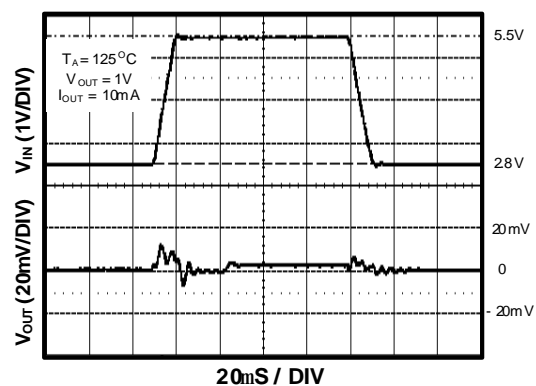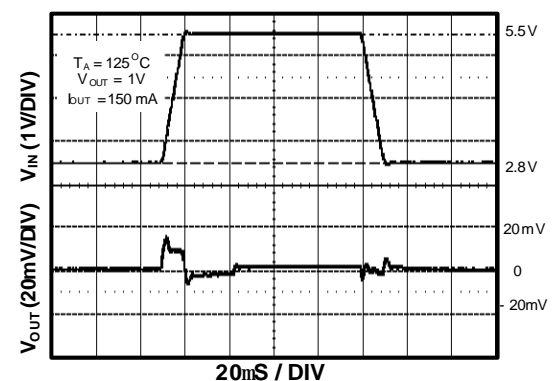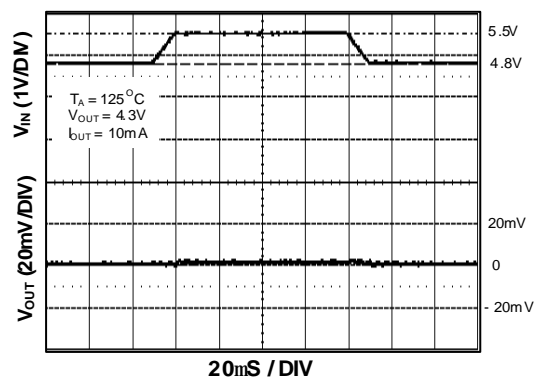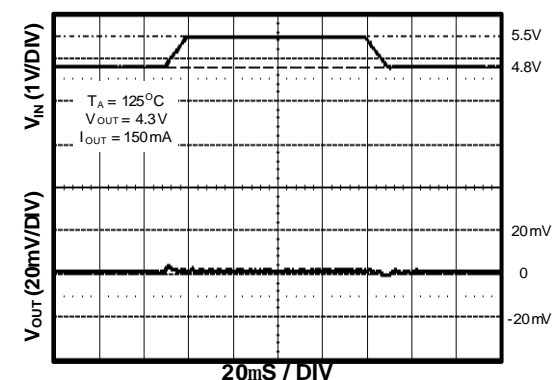
Line Transient Response

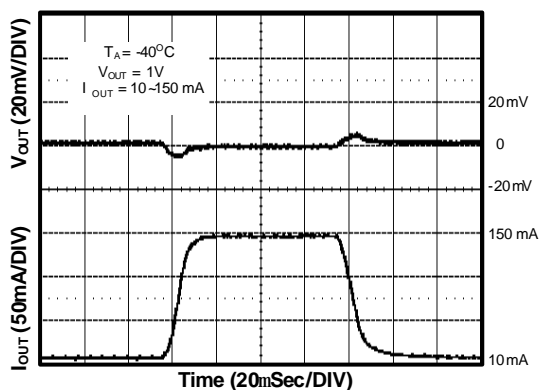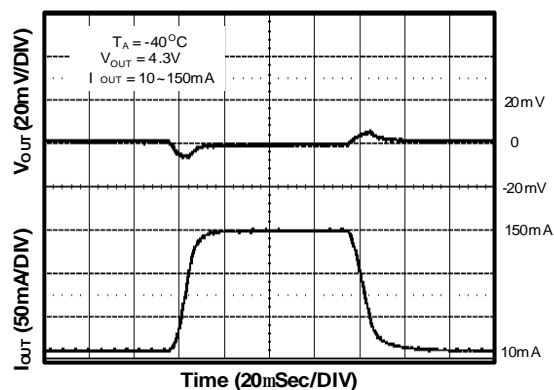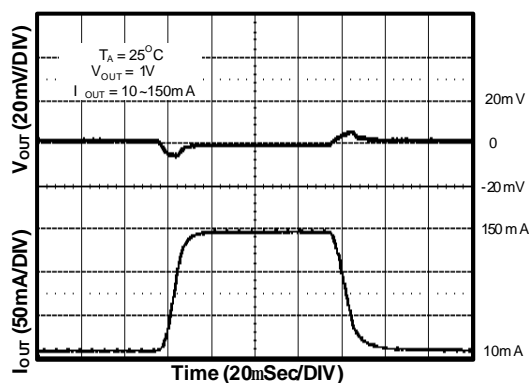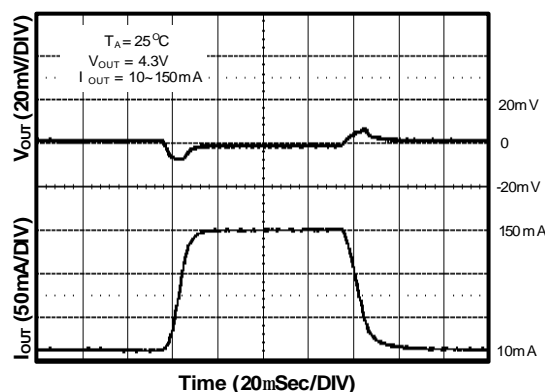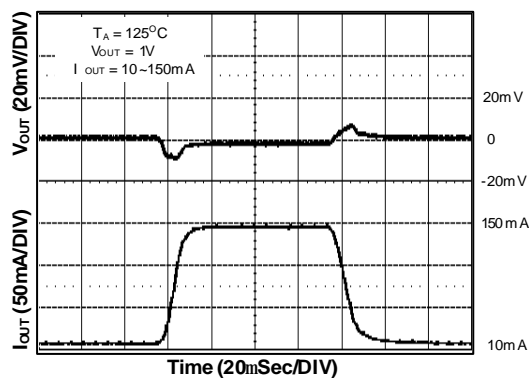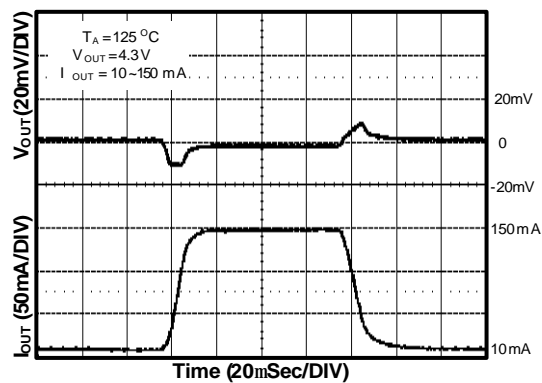Line Transient Response

Line Transient Response

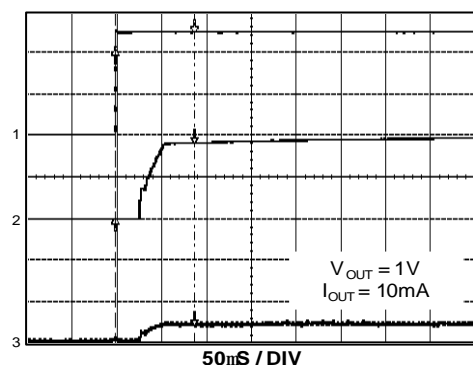Line Transient Response

Line Transient Response

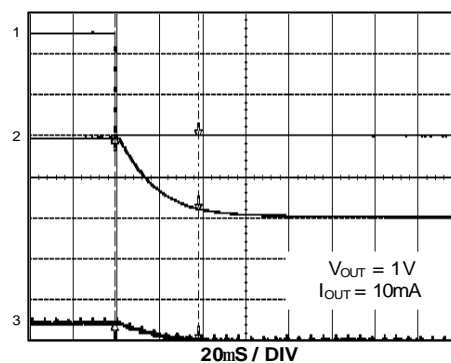Line Transient Response


■ Characterization Curve (Contd.)
Load Transient Response

Load Transient Response

Load Transient Response

Load Transient Response

Load Transient Response

Load Transient Response


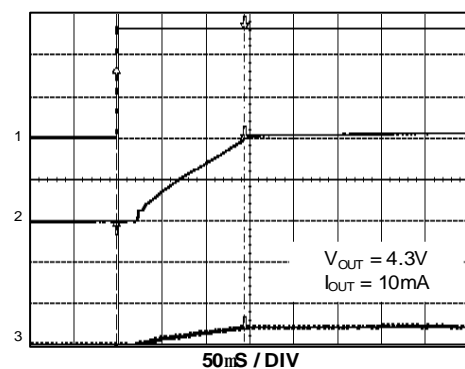
■ Characterization Curve (Contd.)

Chip Enable Transient Response


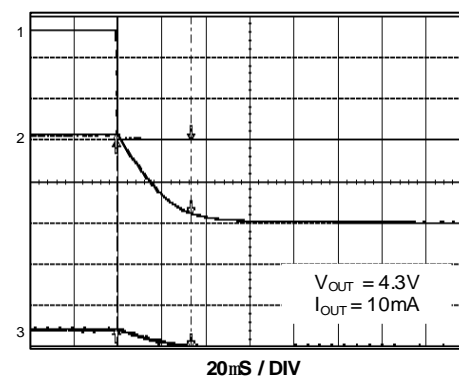
- 1) EN= 1V/div
- 2) $V_{OUT} = 500mV/div$
- 3) $I_{OUT} = 20mA/div$

Chip Enable Transient Response


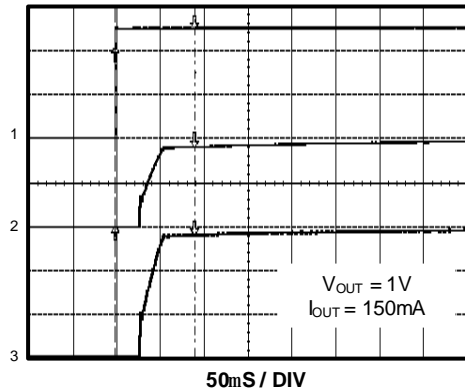
- 1) EN= 1V/div
- 2) $V_{OUT} = 500V/div$
- 3) $I_{OUT} = 20mA/div$

Chip Enable Transient Response


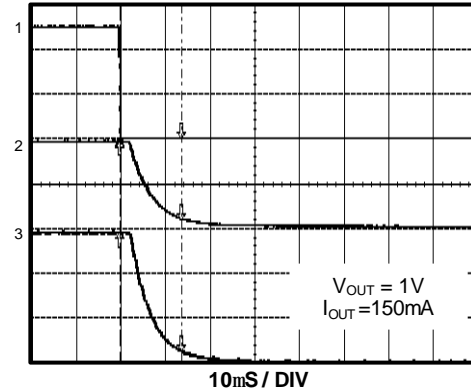
- 1) EN= 2V/div
- 2) $V_{OUT} = 2V/div$
- 3) $I_{OUT} = 20mA/div$

Chip Enable Transient Response


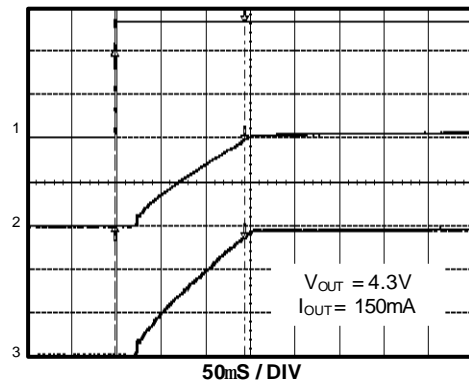
- 1) EN= 2V/div
- 2) $V_{OUT} = 2V/div$
- 3) $I_{OUT} = 20mA/div$

■ Characterization Curve (Contd.)
Chip Enable Transient Response


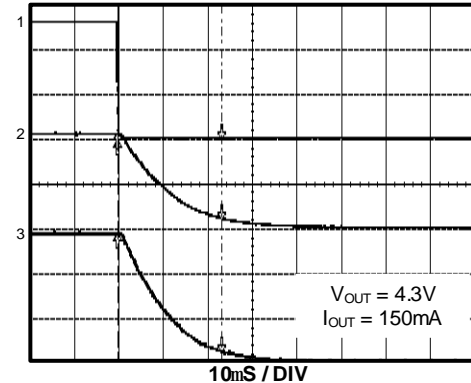
- 1) EN= 1V/div
- 2) $V_{OUT} = 500mV/div$
- 3) $I_{OUT} = 50mA/div$

Chip Enable Transient Response


- 1) EN= 1V/div
- 2) $V_{OUT} = 500mV/div$
- 3) $I_{OUT} = 50mA/div$

Chip Enable Transient Response


- 1) EN= 2V/div
- 2) $V_{OUT} = 2V/div$
- 3) $I_{OUT} = 50mA/div$


Chip Enable Transient Response


- 1) EN= 2V/div
- 2) $V_{OUT} = 2V/div$
- 3) $I_{OUT} = 50mA/div$

AME8852A

■ Tape and Reel Dimension


SOT-23

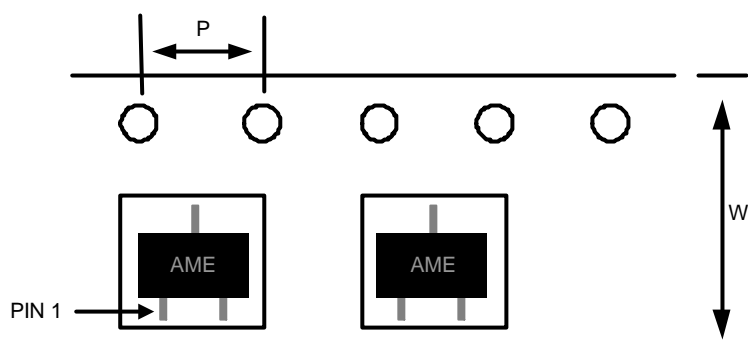

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-23	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

SC-70-4 (SC-82)

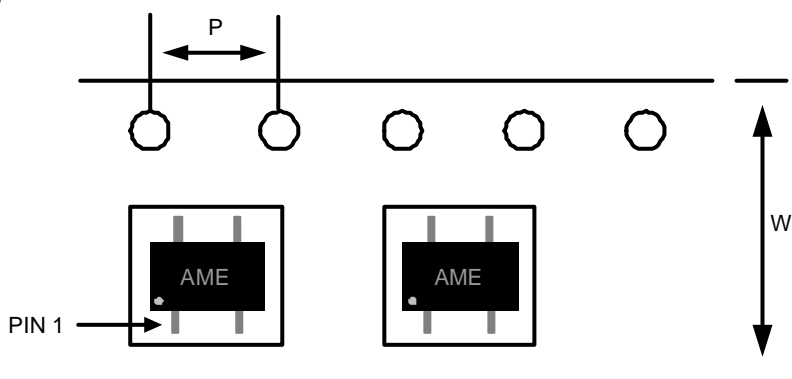


Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SC-70-4	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

■ Tape and Reel Dimension (Contd.)


SC-70-5

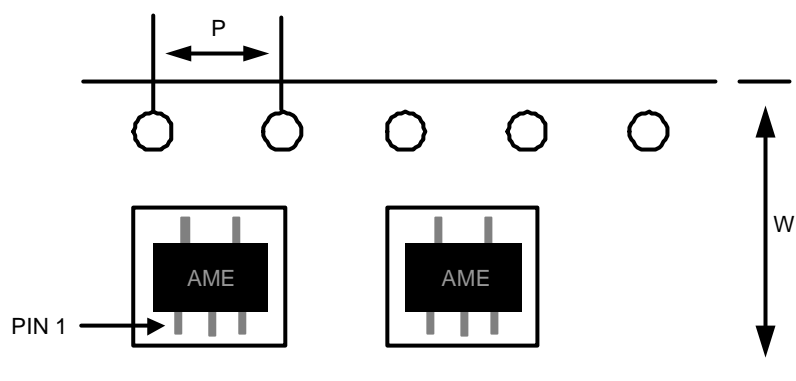

Carrier Tape, Number of Components Per Reel and Reel Size


Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SC-70-5	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

SOT-25

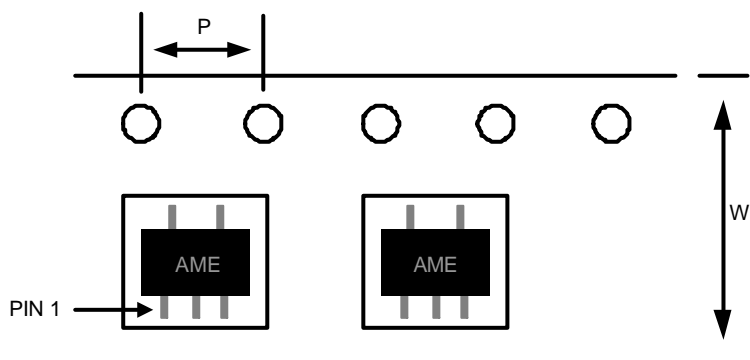

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-25	8.0±0.1 mm	4.0±0.1 mm	3000pcs	180±1 mm

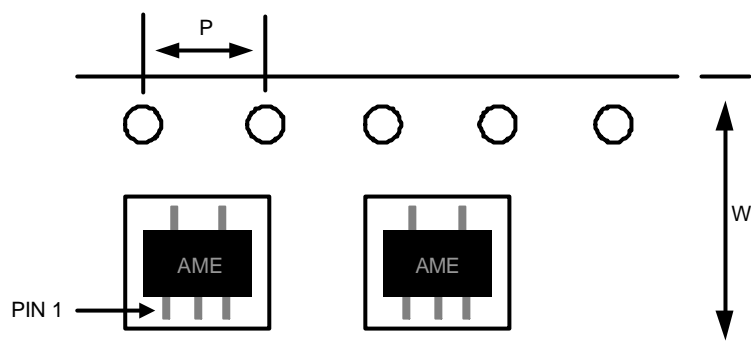
AME8852A
■ Tape and Reel Dimension (Contd.)
TSOT-25A

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
TSOT-25A	8.0 ± 0.1 mm	4.0 ± 0.1 mm	3000pcs	180 ± 1 mm

AME8852A

■ Package Dimension

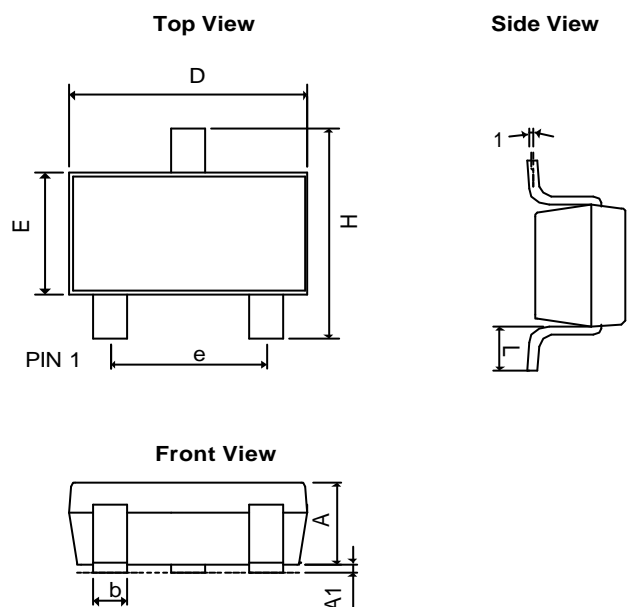SOT-23




SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.90	1.40	0.0354	0.0551
A ₁	0.00	0.15	0.0000	0.0059
b	0.30	0.50	0.0118	0.0197
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.0748 BSC	
H	2.40	3.00	0.0945	0.1181
L	0.35BSC		0.0138 BSC	
q1	0°	10°	0°	10°

AME8852A

■ Package Dimension (Contd.)


SC-70-4

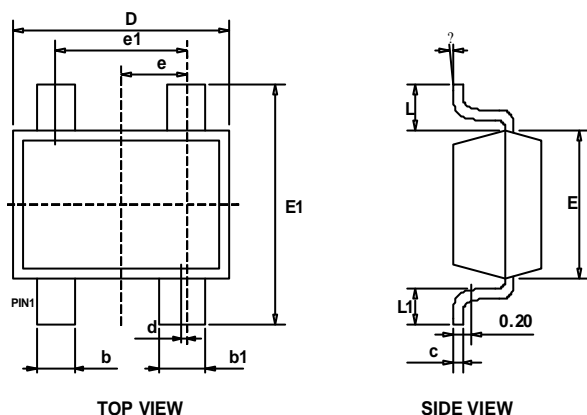

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.250	0.400	0.010	0.016
b1	0.350	0.500	0.014	0.020
c	0.080	0.150	0.003	0.006
d	0.050 TYP		0.002 TYP	
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650 TYP		0.026 TYP	
e1	1.200	1.400	0.047	0.055
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
q	0°	8°	0°	8°

■ Package Dimension (Contd.)


SC-70-5

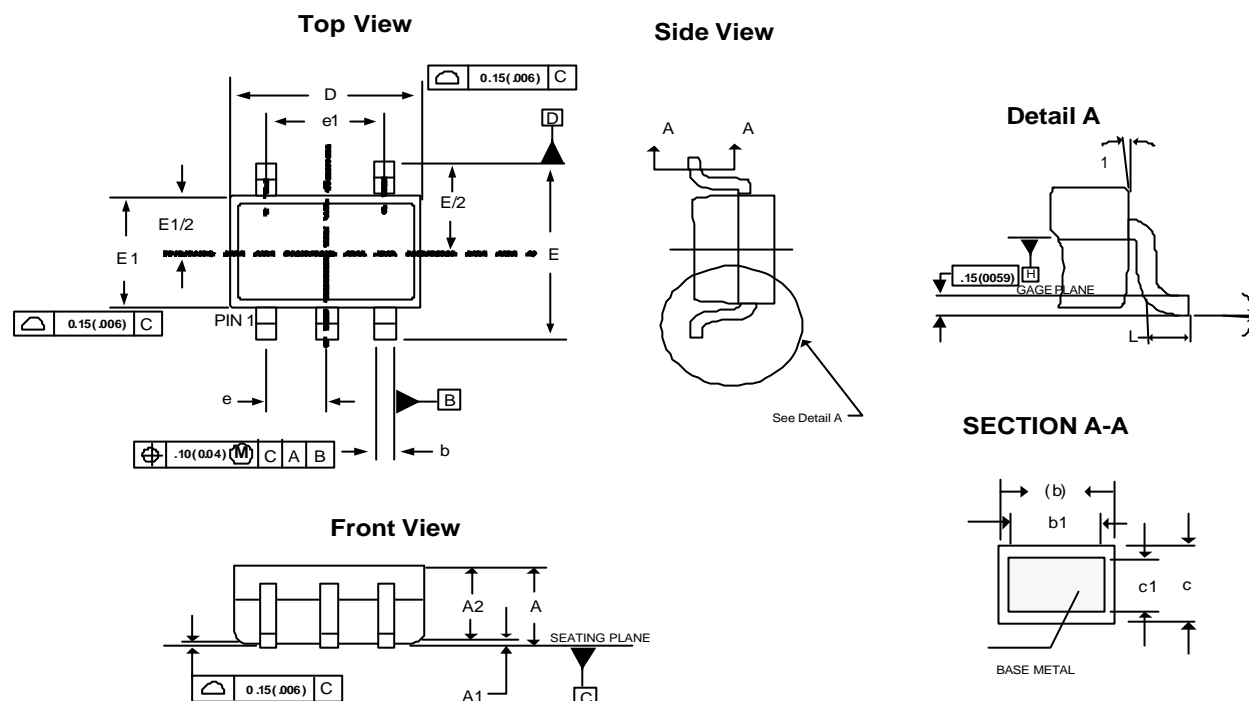

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.80	1.10	0.0315	0.0433
A1	0.00	0.10	0.0000	0.0039
A2	0.80	1.00	0.0315	0.0394
b	0.15	0.35	0.0059	0.0138
b1	0.15	0.25	0.0059	0.0098
c	0.08	0.25	0.0031	0.0098
c1	0.08	0.20	0.0031	0.0079
D	1.85	2.20	0.0728	0.0866
E	1.80	2.45	0.0709	0.0965
E1	1.10	1.40	0.0433	0.0551
e	0.65 BSC		0.0255 BSC	
e1	1.20	1.40	0.0472	0.0551
L	0.26	0.46	0.0102	0.0181
q1	0°	8°	0°	8°
q	4°	10°	4°	10°


■ Package Dimension (Contd.)

SOT-25

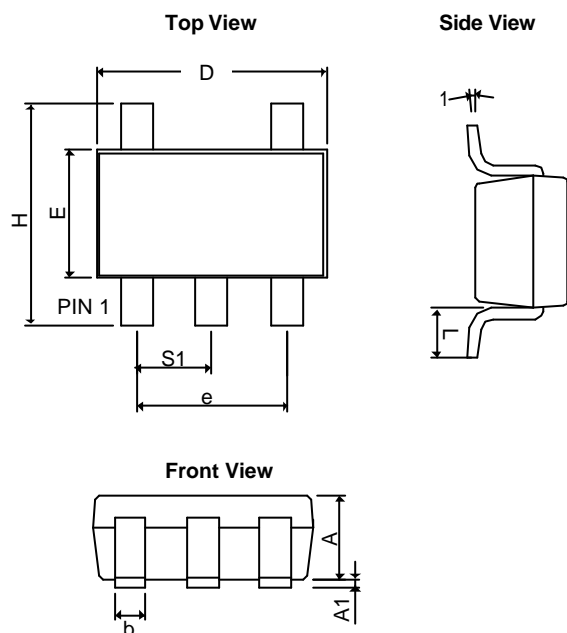

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.90	1.30	0.0354	0.0512
A ₁	0.00	0.15	0.0000	0.0059
b	0.30	0.55	0.0118	0.0217
D	2.70	3.10	0.1063	0.1220
E	1.40	1.80	0.0551	0.0709
e	1.90 BSC		0.07480 BSC	
H	2.60	3.00	0.10236	0.11811
L	0.37BSC		0.0146BSC	
q1	0°	10°	0°	10°
S ₁	0.95BSC		0.0374BSC	

TSOT-25A

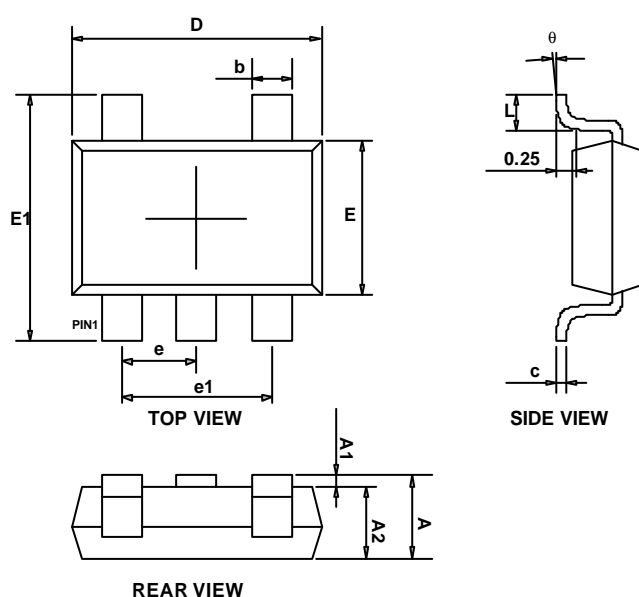


SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.700	0.900	0.028	0.035
A1	0.000	0.100	0.000	0.004
A2	0.700	0.800	0.028	0.031
b	0.350	0.500	0.014	0.020
c	0.080	0.200	0.003	0.008
D	2.820	3.020	0.111	0.119
E	1.600	1.700	0.063	0.067
E1	2.650	2.950	0.104	0.116
e	0.95 BSC		0.037 BSC	
e1	1.90 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
q	0°	8°	0°	8°

AME8852A

■ Lead Pattern

SOT-23

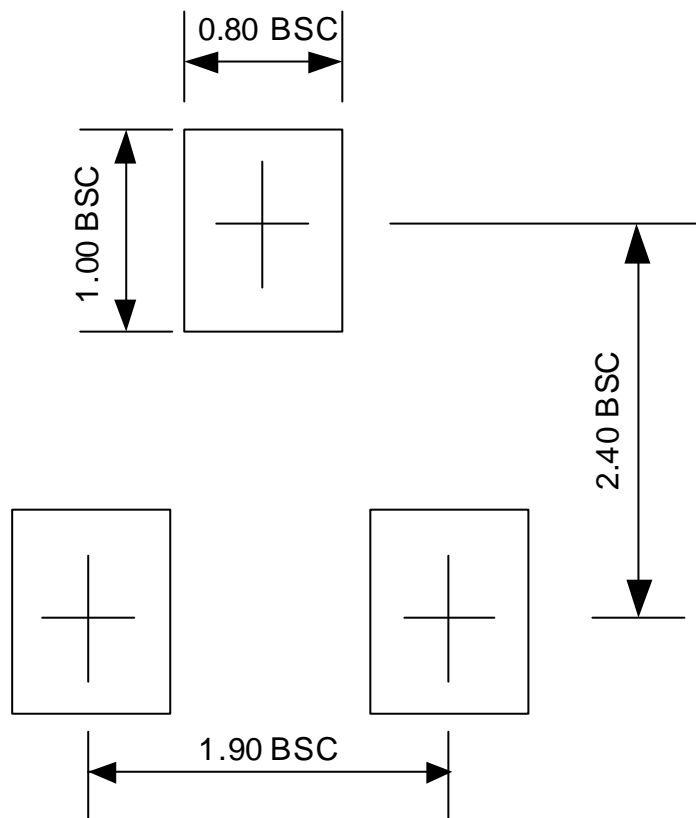


Note:

1. Lead pattern unit description:

BSC: Basic. Represents theoretical exact dimension or dimension target.

2. Dimensions in Millimeters.

3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

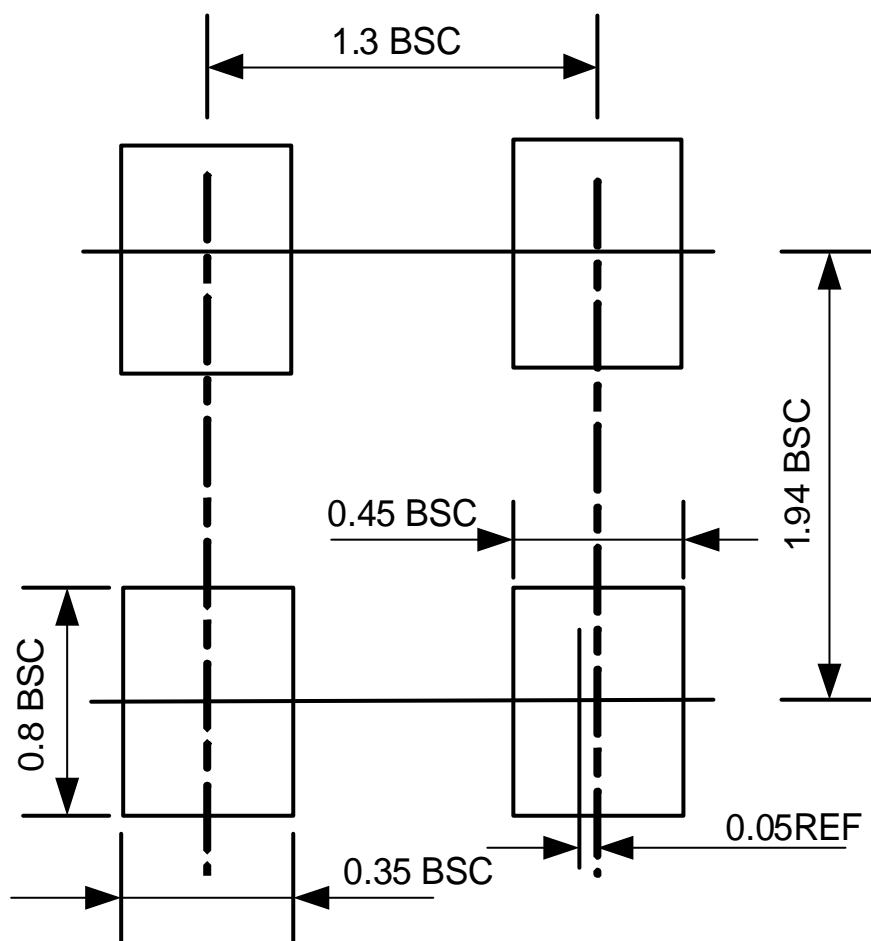■ Lead Pattern (Contd.)
SC-70-4(SC-82)


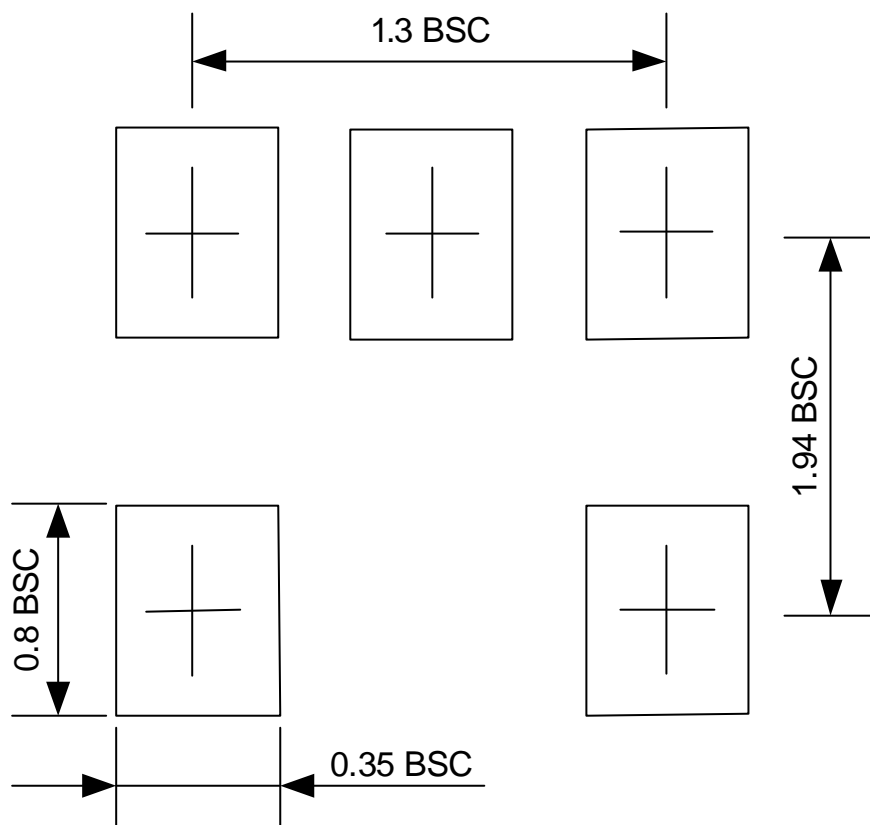
Note:

1. Lead pattern unit description:

BSC: Basic. Represents theoretical exact dimension or dimension target.

2. Dimensions in Millimeters.

3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

AME8852A
■ Lead Pattern (Contd.)
SC-70-5


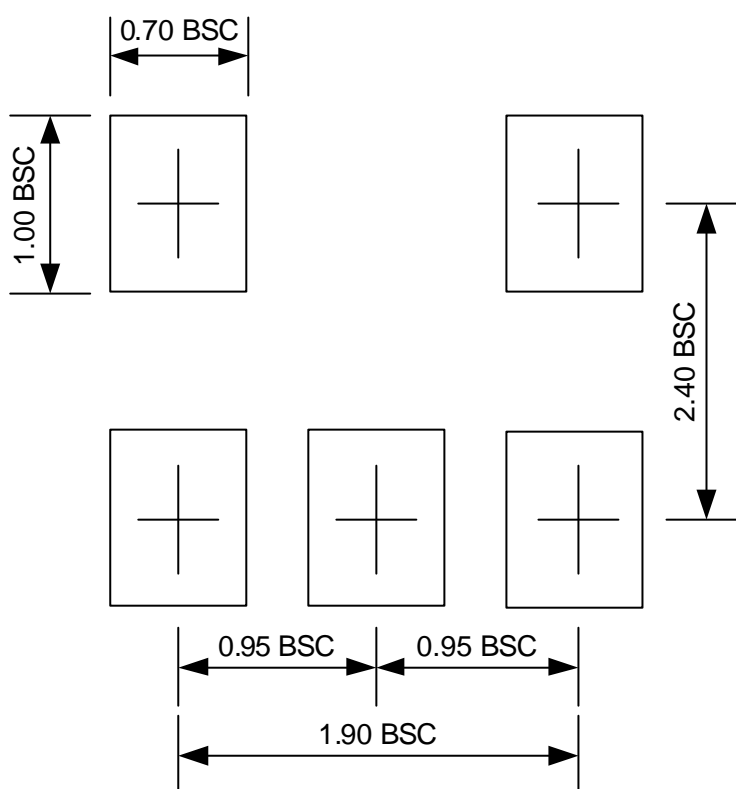
Note:

1. Lead pattern unit description:

BSC: Basic. Represents theoretical exact dimension or dimension target.

2. Dimensions in Millimeters.

3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

AME8852A
■ Lead Pattern (Contd.)
SOT-25


Note:

1. Lead pattern unit description:

BSC: Basic. Represents theoretical exact dimension or dimension target.


2. Dimensions in Millimeters.

3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.

AME8852A

■ Lead Pattern (Contd.)

TSOT-25A

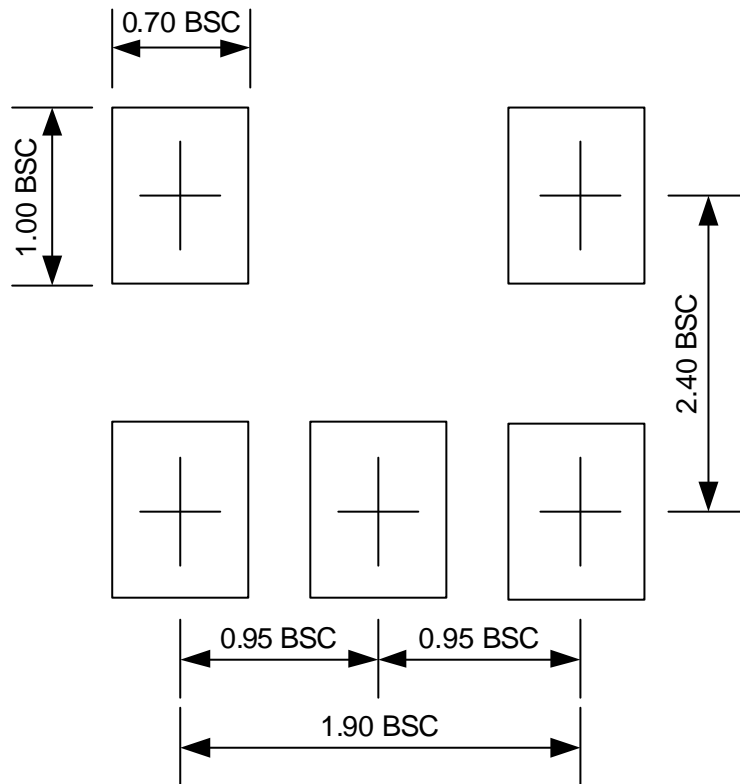

Note:

1. Lead pattern unit description:

BSC: Basic. Represents theoretical exact dimension or dimension target.

2. Dimensions in Millimeters.

3. General tolerance $\pm 0.05\text{mm}$ unless otherwise specified.



www.ame.com.tw
E-Mail: sales@ame.com.tw

Life Support Policy:

These products of AME, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of AME, Inc.

AME, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

© AME, Inc. , May 2012

Document: TM001-DS8852A-A.01

Corporate Headquarter
AME, Inc.

8F, 12, WenHu St., Nei Hu
Taipei, Taiwan. 114
Tel: 886 2 2627-8687
Fax: 886 2 2659-2989