

WATER COOLED A.C. SWITCH

2-2W5-PI

Repetitive voltage up to

Maximum continuous RMS current

Surge current

1600 V

1275 A

8.4 kA


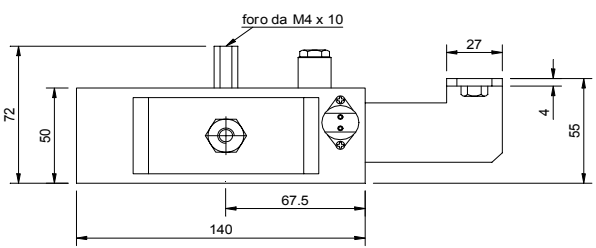
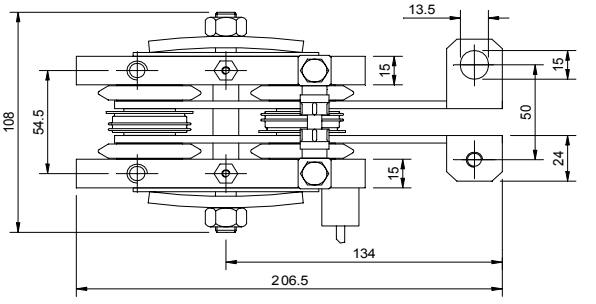

FINAL SPECIFICATION

mag 02 - ISSUE : 01

Symbol	Characteristic	Conditions	T <sub>J</sub> [°C]	Value	Unit
<b>BLOCKING</b>					
V <sub>DRM</sub> /V <sub>RRM</sub>	Repetitive peak voltage		125	1600	V
V <sub>DSM</sub> /V <sub>RSM</sub>	Non-repetitive peak voltage		125	1700	V
I <sub>DRM</sub> /I <sub>RRM</sub>	Repetitive peak voltage		125	50	mA
<b>CONDUCTING</b>					
I <sub>T(RMS)</sub>	Maximum continuous RMS current	50 Hz, Q = 5 l/min, water temperature = 30°C		1275	A
I <sub>TSM</sub>	Surge on-state current	Max peak one cycle sine wave, 10 ms.	125	8.4	kA
I <sup>2</sup> t	I <sup>2</sup> t	Without reverse voltage reapplied		353 x1E3	A²s
V <sub>TM</sub>	Max peak on-state voltage	I <sub>TM</sub> = 1800 A	125	2.08	V
V <sub>T(TO)</sub>	Threshold voltage		125	0.93	V
r <sub>T</sub>	On-state slope resistance		125	0.640	mΩ
<b>SWITCHING</b>					
di/dt	Critical rate of rise of on-state current, min.	From 75% V <sub>DRM</sub> up to 1650 A, gate 10 V - 5 Ω	125	200	A/μs
dv/dt	Critical rate of rise of off-state voltage, min.	Linear ramp up to 70% of V <sub>DRM</sub>	125	500	V/μs
<b>GATE</b>					
V <sub>GT</sub>	Gate trigger voltage	V <sub>D</sub> =5 V	25	3.5	V
I <sub>GT</sub>	Gate trigger current	V <sub>D</sub> =5 V	25	200	mA
P <sub>GM</sub>	Max peak gate power	Pulse width 100 μs	25	150	W
<b>MECHANICAL</b>					
R <sub>th(j-w)</sub>	Thermal impedance, DC	Junction to water (double side cooled)		0.09	°C/W
Press	Max water pressure			10	bar
V <sub>ins(RMS)</sub>	Insulation voltage rms	1 min	25	2.5	kV
T <sub>J max</sub>	Max operating junction temperature			125	°C
Weight				3200	g
				Thermal switch open 60°C, cloused 50°C. 10 A - 250 V	

OUTLINE

YO

DEVICES TYPE: AT603