



Micro Commercial Components  
21201 Itasca Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

# SMLJ5.0 THRU SMLJ170CA

## Features

- For surface mount application in order to optimize board space
- Low inductance
- Low profile package
- Built-in strain relief
- Glass passivated junction
- Excellent clamping capability
- Repetition Rate( duty cycle): 0.5%
- Fast response time: typical less than 1ps from 0V to BV min
- Typical  $I_D$  less than 1uA above 10V
- High temperature soldering: 250°C/10 seconds at terminals
- Plastic package has Underwrites Laboratory Flammability Classification 94V-O

## Mechanical Data

- CASE: JEDEC DO-214AB molded plastic body over passivated junction
- Terminals: solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes positive end( cathode) except Bi-directional types.
- Standard packaging: 16mm tape per ( EIA 481).
- Weight: 0.007 ounce, 0.21 gram

Maximum Ratings @ 25°C Unless Otherwise Specified


Peak Pulse Current on 10/1000us waveform(Note1, Fig3)	$I_{PPM}$	See Table 1	Amps
Peak Pulse Power Dissipation on 10/1000us waveform(Note1,2, Fig1)	$P_{PPM}$	Minimum 3000	Watts
Peak forward surge current (JEDEC Method) (Note 2,3)	$I_{FSM}$	200.0	Amps
Operation And Storage Temperature Range	$T_J$ , $T_{STG}$	-55°C to +150°C	

### NOTES:

1. Non-repetitive current pulse per Fig.3 and derated above  $T_A=25^\circ\text{C}$  per Fig.2.
2. Mounted on 8.0mm<sup>2</sup> copper pads to each terminal.
3. 8.3ms, single half sine-wave or equivalent square wave, duty cycle=4 pulses per. Minutes maximum.


## Transient Voltage Suppressor 5.0 to 170 Volts 3000 Watt

### DO-214AB (SMLJ) (LEAD FRAME)

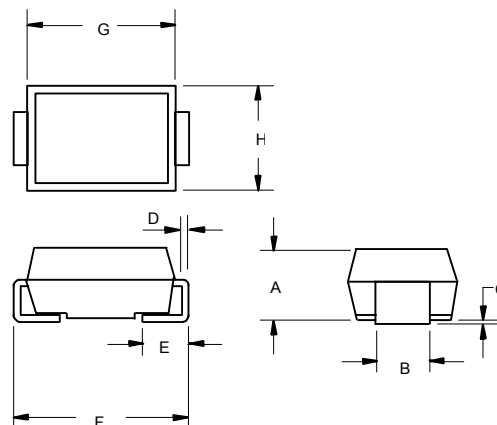

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.079	.103	2.00	2.62	
B	.115	.121	2.92	3.07	
C	.002	.008	0.051	0.203	
D	.006	.012	0.152	0.305	
E	.030	.050	0.76	1.27	
F	.305	.320	7.75	8.13	
G	.260	.280	6.60	7.11	
H	.220	.245	5.59	6.22	

### SUGGESTED SOLDER PAD LAYOUT

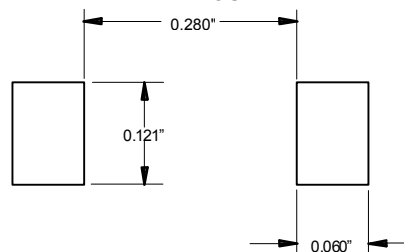

# SMLJ5.0 thru SMLJ170CA

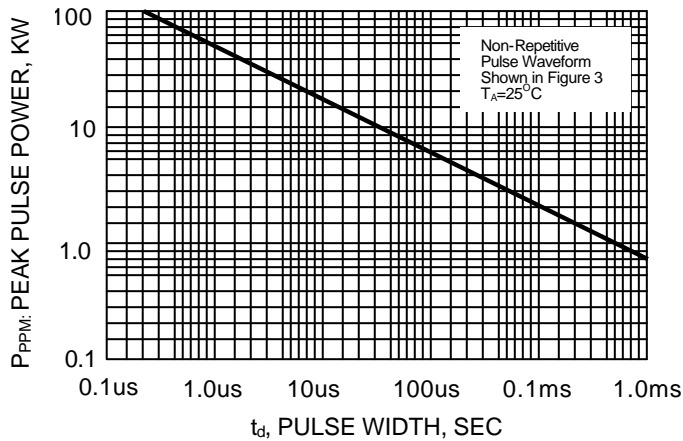


Fig. 1-PEAL PULSE POWER VS PULSE.TIME

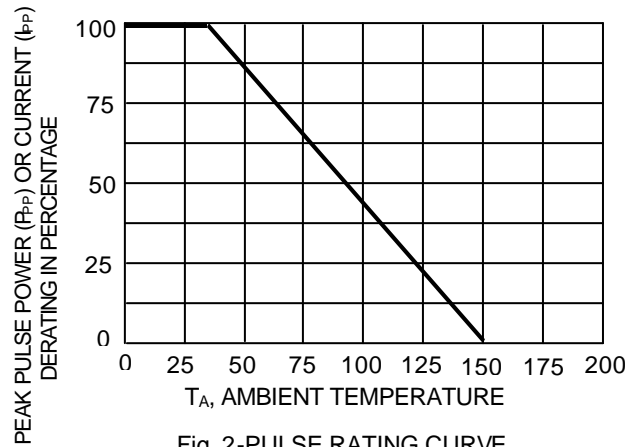


Fig. 2-PULSE RATING CURVE

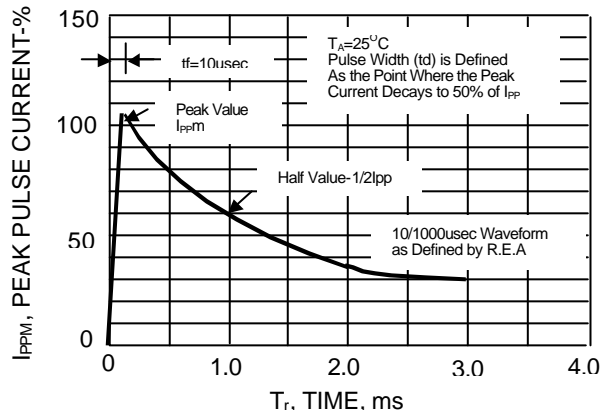


Fig. 3-PULSE WAVEFORM

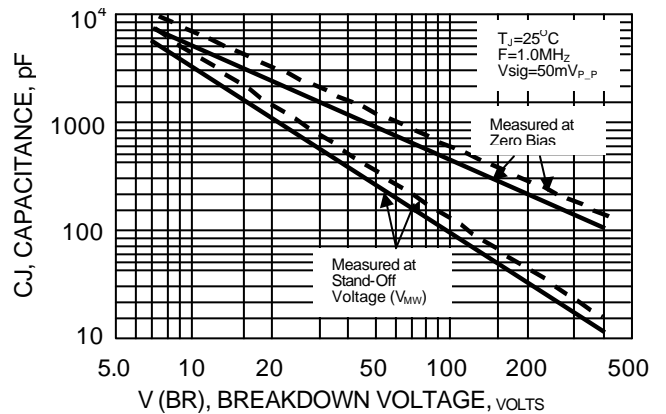


Fig. 4-TYPICAL CAPACITANCE VS STAND-OFF VOLTAGE

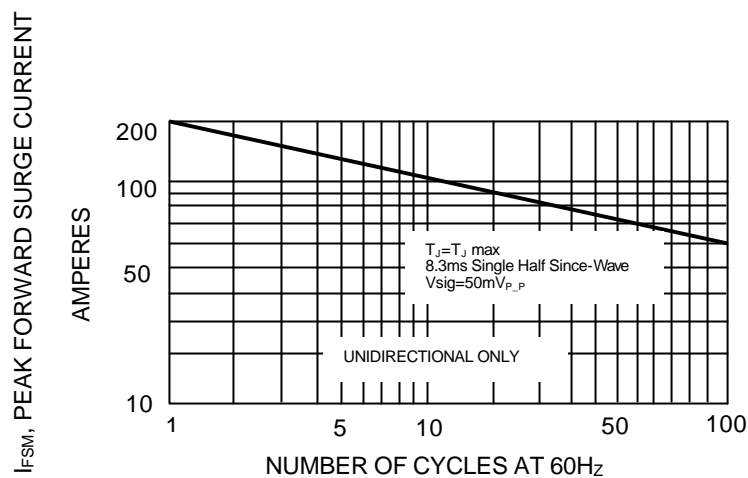


Fig-5MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CUTTENT

# SMLJ5.0 THRU SMLJ170CA

Electrical Characteristics @ 25°C Unless Otherwise Specified

MCC PART NUMBER	REVERSE STAND-OFF VOLTAGE $V_{WM}$	BREAKDOWN VOLTAGE $V_{(BR)} @ I_T$ (VOLTS)			MAXIMUM CLAMPING VOLTAGE @ $I_{PP}$	PEAK PULSE CURRENT $I_{PP}$	MAXIMUM REVERSE LEAKAGE @ $V_{WM}$ $I_b$	MARKING CODE
	VOLTS	MIN	MAX	$I_T$ (mA)	VOLTS	(AMPS)	(uA)	
SMLJ5.0	5.0	6.40	7.30	10	9.6	312.5	1000	HDD
SMLJ5.0A	5.0	6.40	7.00	10	9.2	326.0	1000	HDE
SMLJ6.0	6.0	6.67	8.15	10	11.4	263.2	1000	HDF
SMLJ6.0A	6.0	6.67	7.37	10	10.3	291.3	1000	HDG
SMLJ6.5	6.5	7.22	8.82	10	12.3	243.9	500	HDH
SMLJ6.5A	6.5	7.22	7.98	10	11.2	267.9	500	HDK
SMLJ7.0	7.0	7.78	9.51	10	13.3	225.6	200	HDL
SMLJ7.0A	7.0	7.78	8.60	10	12.0	250.0	200	HDM
SMLJ7.5	7.5	8.33	10.2	1	14.3	209.8	100	HDN
SMLJ7.5A	7.5	8.33	9.21	1	12.9	232.6	100	HDP
SMLJ8.0	8.0	8.89	10.9	1	15.0	200.0	50	HDQ
SMLJ8.0A	8.0	8.89	9.83	1	13.6	220.6	50	HDR
SMLJ8.5	8.5	9.44	11.5	1	15.9	118.8	25	HDS
SMLJ8.5A	8.5	9.44	10.4	1	14.4	208.4	25	HDT
SMLJ9.0	9.0	10.0	12.2	1	16.9	177.4	10	HDU
SMLJ9.0A	9.0	10.0	11.1	1	15.4	194.8	10	HDV
SMLJ10	10	11.1	13.6	1	18.8	159.6	5	HDW
SMLJ10A	10	11.1	12.3	1	17.0	176.4	5	HDX
SMLJ11	11	12.2	14.9	1	20.1	149.2	5	HDY
SMLJ11A	11	12.2	13.5	1	18.2	164.8	5	HDZ
SMLJ12	12	13.3	16.3	1	22.0	136.4	5	HED
SMLJ12A	12	13.3	14.7	1	19.9	150.6	5	HEE
SMLJ13	13	14.4	17.6	1	23.8	126.0	5	HEF
SMLJ13A	13	14.4	15.5	1	21.5	139.4	5	HEG
SMLJ14	14	15.6	19.1	1	25.8	116.2	5	HEH
SMLJ14A	14	15.6	17.2	1	23.2	129.4	5	HEK
SMLJ15	15	16.7	20.4	1	26.9	111.6	5	HEL
SMLJ15A	15	16.7	18.5	1	24.4	123.0	5	HEM
SMLJ16	16	17.8	21.8	1	28.8	104.2	5	HEN
SMLJ16A	16	17.8	19.7	1	26.0	115.4	5	HEP
SMLJ17	17	18.9	23.1	1	30.5	98.4	5	HEQ
SMLJ17A	17	18.9	20.9	1	27.6	106.6	5	HER
SMLJ18	18	20.0	24.4	1	32.2	93.2	5	HES
SMLJ18A	18	20.0	22.1	1	29.2	102.8	5	HET
SMLJ20	20	22.2	27.1	1	35.8	83.8	5	HEU
SMLJ20A	20	22.2	24.5	1	32.4	92.6	5	HEV
SMLJ22	22	24.4	29.8	1	39.4	76.2	5	HEW
SMLJ22A	22	24.4	26.9	1	35.5	84.4	5	HEX
SMLJ24	24	26.7	32.6	1	43.0	69.8	5	HEY
SMLJ24A	24	26.7	29.5	1	38.9	77.2	5	HEZ
SMLJ26	26	28.9	35.3	1	46.6	64.4	5	HFD
SMLJ26A	26	28.9	31.9	1	42.1	71.2	5	HFE

# SMLJ5.0 THRU SMLJ170CA

Electrical Characteristics @ 25°C Unless Otherwise Specified

MCC PART NUMBER	REVERSE STAND-OFF VOLTAGE $V_{WM}$	BREAKDOWN VOLTAGE $V_{(BR)} @ I_T$ (VOLTS)			MAXIMUM CLAMPING VOLTAGE @ $I_{PP}$	PEAK PULSE CURRENT $I_{PP}$	MAXIMUM REVERSE LEAKAGE @ $V_{WM}$ $I_b$	MARKING CODE
	VOLTS	MIN	MAX	$I_T$ (mA)	VOLTS	(AMPS)	( $\mu$ A)	
SMLJ28	28	31.1	38.0	1	50.0	60.0	5	HFF
SMLJ28A	28	31.1	34.4	1	45.4	66.0	5	HFG
SMLJ30	30	33.3	40.7	1	53.5	56.0	5	HFH
SMLJ30A	30	33.3	36.8	1	48.4	62.0	5	HKF
SMLJ33	33	36.7	44.9	1	59.0	50.4	5	HFL
SMLJ33A	33	36.7	40.6	1	53.3	56.2	5	HFM
SMLJ36	36	40.0	48.9	1	64.3	46.6	5	HFN
SMLJ36A	36	40.0	44.2	1	58.1	51.6	5	HFP
SMLJ40	40	44.4	54.3	1	71.4	42.0	5	HFQ
SMLJ40A	40	44.4	49.1	1	64.5	46.4	5	HFR
SMLJ43	43	47.8	58.4	1	76.7	39.2	5	HFS
SMLJ43A	43	47.8	52.8	1	69.4	43.2	5	HFT
SMLJ45	45	50.0	61.1	1	80.3	37.4	5	HFU
SMLJ45A	45	50.0	55.3	1	72.7	41.2	5	HFV
SMLJ48	48	53.3	65.1	1	85.5	35.0	5	HFV
SMLJ48A	48	53.3	58.9	1	77.4	38.8	5	HFX
SMLJ51	51	56.7	69.3	1	91.1	37.0	5	HFY
SMLJ51A	51	56.7	62.7	1	82.4	36.4	5	HFZ
SMLJ54	54	60.0	73.3	1	96.3	31.2	5	HGD
SMLJ54A	54	60.0	66.3	1	87.1	34.4	5	HGE
SMLJ58	58	64.4	78.7	1	103	39.2	5	HGF
SMLJ58A	58	64.4	71.2	1	93.6	32.0	5	HGG
SMLJ60	60	66.7	81.5	1	107	28.0	5	HGH
SMLJ60A	60	66.7	73.7	1	96.8	31.0	5	HGK
SMLJ64	64	71.1	86.9	1	114	26.4	5	HGL
SMLJ64A	64	71.1	78.6	1	103	29.2	5	HGM
SMLJ70	70	77.8	95.1	1	125	24.0	5	HGN
SMLJ70A	70	77.8	86.0	1	113	26.6	5	HGP
SMLJ75	75	83.3	102.0	1	134	22.4	5	HGQ
SMLJ75A	75	83.3	92.1	1	121	24.8	5	HGR
SMLJ78	78	86.7	106.0	1	139	21.6	5	HGS
SMLJ78A	78	86.7	95.8	1	126	22.8	5	HGT
SMLJ85	85	94.4	115.0	1	151	19.8	5	HGU
SMLJ85A	85	94.4	104.0	1	137	20.8	5	HGV
SMLJ90	90	100	122.0	1	160	18.8	5	HGW
SMLJ90A	90	100	111.0	1	146	20.6	5	HGX
SMLJ100	100	111	136	1	179	16.8	5	HGY
SMLJ100A	100	111	123	1	162	18.6	5	HGZ
SMLJ110	110	122	149.0	1	196	15.4	5	HHD
SMLJ110A	110	122	135.0	1	177	16.8	5	HHE
SMLJ120	120	133	163	1	214	14.0	5	HHF
SMLJ120A	120	133	147	1	193	15.6	5	HHG

# SMLJ5.0 THRU SMLJ170CA

Electrical Characteristics @ 25°C Unless Otherwise Specified

MCC PART NUMBER	REVERSE STAND-OFF VOLTAGE $V_{WM}$	BREAKDOWN VOLTAGE $V_{(BR)} @ I_T$ (VOLTS)			MAXIMUM CLAMPING VOLTAGE @ $I_{PP}$	PEAK PULSE CURRENT $I_{PP}$	MAXIMUM REVERSE LEAKAGE @ $V_{WM}$ $I_b$	MARKING CODE
	VOLTS	MIN	MAX	$I_T$ (mA)	VOLTS	(AMPS)	(uA)	
SMLJ130	130	144	176.0	1	231	13.0	5	HHH
SMLJ130A	130	144	159.0	1	209	14.4	5	HHK
SMLJ150	150	167	204.0	1	268	11.2	5	HHL
SMLJ150A	150	167	185.0	1	243	12.4	5	HHM
SMLJ160	160	178	218.0	1	287	10.4	5	HHN
SMLJ160A	160	178	197.0	1	259	11.6	5	HHP
SMLJ170	170	189	231.0	1	304	9.8	5	HHQ
SMLJ170A	170	189	209.0	1	275	11.0	5	HHR

# SMLJ5.0 THRU SMLJ170CA

Electrical Characteristics @ 25°C Unless Otherwise Specified

MCC PART NUMBER	REVERSE STAND-OFF VOLTAGE $V_{WM}$	BREAKDOWN VOLTAGE $V_{(BR)} @ I_T$ (VOLTS)			MAXIMUM CLAMPING VOLTAGE @ $I_{PP}$	PEAK PULSE CURRENT $I_{PP}$	MAXIMUM REVERSE LEAKAGE @ $V_{WM}$ $I_b$	MARKING CODE
	VOLTS	MIN	MAX	$I_T$ (mA)	VOLTS	(AMPS)	( $\mu$ A)	
SMLJ5.0 C	5.0	6.40	7.30	10	9.6	312.5	2000	IDD
SMLJ5.0 CA	5.0	6.40	7.00	10	9.2	326.0	2000	IDE
SMLJ6.0 C	6.0	6.67	8.15	10	11.4	263.2	2000	IDF
SMLJ6.0 CA	6.0	6.67	7.37	10	10.3	291.3	2000	IDG
SMLJ6.5 C	6.5	7.22	8.82	10	12.3	243.9	1000	IDH
SMLJ6.5 CA	6.5	7.22	7.98	10	11.2	267.9	1000	IDK
SMLJ7.0 C	7.0	7.78	9.51	10	13.3	225.6	400	IDL
SMLJ7.0 CA	7.0	7.78	8.60	10	12.0	250.0	400	IDM
SMLJ7.5 C	7.5	8.33	10.20	1	14.3	209.8	200	IDN
SMLJ7.5 CA	7.5	8.33	9.21	1	12.9	232.6	200	IDP
SMLJ8.0 C	8.0	8.89	10.9	1	15.0	200.0	100	IDQ
SMLJ8.0 CA	8.0	8.89	9.83	1	13.6	220.6	100	IDR
SMLJ8.5 C	8.5	9.44	11.50	1	15.9	168.8	50	IDS
SMLJ8.5 CA	8.5	9.44	10.40	1	14.4	208.4	50	IDT
SMLJ9.0 C	9.0	10.0	12.2	1	16.9	177.4	20	IDU
SMLJ9.0 CA	9.0	10.0	11.1	1	15.4	194.8	20	IDV
SMLJ10 C	10	11.1	13.6	1	18.8	159.6	5	IDW
SMLJ10 CA	10	11.1	12.3	1	17.0	176.4	5	IDX
SMLJ11 C	11	12.2	14.9	1	20.1	149.2	5	IDY
SMLJ11 CA	11	12.2	13.5	1	18.2	184.8	5	IDZ
SMLJ12 C	12	13.3	16.3	1	22.0	136.4	5	IED
SMLJ12 CA	12	13.3	14.7	1	19.9	150.6	5	IEE
SMLJ13 C	13	14.4	17.6	1	23.8	126.0	5	IEF
SMLJ13 CA	13	14.4	15.9	1	21.5	139.4	5	IEG
SMLJ14 C	14	15.6	19.1	1	25.8	116.2	5	IEH
SMLJ14 CA	14	15.6	17.2	1	23.2	129.4	5	IEK
SMLJ15 C	15	16.7	20.4	1	26.9	111.6	5	IEL
SMLJ15 CA	15	16.7	18.5	1	24.4	123.0	5	IEM
SMLJ16 C	16	17.8	21.8	1	28.8	104.2	5	IEN
SMLJ16 CA	16	17.8	19.7	1	26.0	115.4	5	IEP
SMLJ17 C	17	18.9	23.1	1	30.5	98.4	5	IEQ
SMLJ17 CA	17	18.9	20.9	1	27.6	106.6	5	IER
SMLJ18 C	18	20.0	24.4	1	32.2	93.2	5	IES
SMLJ18 CA	18	20.0	22.1	1	29.2	102.8	5	IET
SMLJ20 C	20	22.2	27.1	1	35.8	83.8	5	IEU
SMLJ20 CA	20	22.2	24.1	1	32.4	92.6	5	IEV
SMLJ22 C	22	24.4	29.8	1	39.4	76.2	5	IEW
SMLJ22 CA	22	24.4	26.9	1	35.5	84.4	5	IEX
SMLJ24 C	24	26.7	32.6	1	43.0	69.8	5	IEY
SMLJ24 CA	24	26.7	29.5	1	38.9	77.2	5	IEZ
SMLJ26 C	26	28.9	35.3	1	46.6	64.4	5	IFD
SMLJ26 CA	26	28.9	31.9	1	42.1	71.2	5	IFE

# SMLJ5.0 THRU SMLJ170CA

Electrical Characteristics @ 25°C Unless Otherwise Specified

MCC PART NUMBER	REVERSE STAND-OFF VOLTAGE $V_{WM}$	BREAKDOWN VOLTAGE $V_{(BR)} @ I_T$ (VOLTS)			MAXIMUM CLAMPING VOLTAGE @ $I_{PP}$	PEAK PULSE CURRENT $I_{PP}$	MAXIMUM REVERSE LEAKAGE @ $V_{WM}$ $I_b$	MARKING CODE
	VOLTS	MIN	MAX	$I_T$ (mA)	VOLTS	(AMPS)	( $\mu$ A)	
SMLJ28C	28	31.1	38.0	1	50.0	60.0	5	IFF
SMLJ28CA	28	31.1	34.4	1	45.4	66.0	5	IFG
SMLJ30C	30	33.3	40.7	1	53.5	56.0	5	IFH
SMLJ30CA	30	33.3	36.8	1	48.4	62.0	5	IFK
SMLJ33C	33	36.7	44.9	1	59.0	50.4	5	IFL
SMLJ33CA	33	36.7	40.6	1	53.3	56.2	5	IFM
SMLJ36C	36	40.0	48.9	1	64.3	46.6	5	IFN
SMLJ36CA	36	40.0	44.2	1	58.1	51.6	5	IFP
SMLJ40C	40	44.4	54.3	1	71.4	42.0	5	IFQ
SMLJ40CA	40	44.4	49.1	1	64.5	46.4	5	IFR
SMLJ43C	43	47.8	58.4	1	76.7	39.2	5	IFS
SMLJ43CA	43	47.8	52.8	1	69.4	43.2	5	IFT
SMLJ45C	45	50.0	61.1	1	80.3	37.4	5	IFU
SMLJ45CA	45	50.0	55.3	1	72.7	41.2	5	IFV
SMLJ48C	48	53.3	65.1	1	85.5	35.0	5	IFW
SMLJ48CA	48	53.3	58.9	1	77.4	38.8	5	IFX
SMLJ51C	51	56.7	69.3	1	91.1	37.0	5	IFY
SMLJ51CA	51	56.7	62.7	1	82.4	36.4	5	IFZ
SMLJ54C	54	60.0	73.3	1	96.3	31.2	5	IGD
SMLJ54CA	54	60.0	66.3	1	87.1	34.4	5	IGE
SMLJ58C	58	64.4	78.7	1	103	39.2	5	IGF
SMLJ58CA	58	64.4	71.2	1	93.6	32.0	5	IGG
SMLJ60C	60	66.7	81.5	1	107	28.0	5	IGH
SMLJ60CA	60	66.7	73.7	1	96.8	31.0	5	IGK
SMLJ64C	64	71.1	86.9	1	114	26.4	5	IGL
SMLJ64CA	64	71.1	78.6	1	103	29.2	5	IGM
SMLJ70C	70	77.8	95.1	1	125	24.0	5	IGN
SMLJ70CA	70	77.8	86.0	1	113	26.6	5	IGP
SMLJ75C	75	83.3	102.0	1	134	22.4	5	IGQ
SMLJ75CA	75	83.3	92.1	1	121	24.8	5	IGR
SMLJ78C	78	86.7	106.0	1	139	21.6	5	IGS
SMLJ78CA	78	86.7	95.8	1	126	22.8	5	IGT
SMLJ85C	85	94.4	115.0	1	151	19.8	5	IGU
SMLJ85CA	85	94.4	104.0	1	137	20.8	5	IGV
SMLJ90C	90	100	122.0	1	160	18.8	5	IGW
SMLJ90CA	90	100	111.0	1	146	20.6	5	IGX
SMLJ100C	100	111	136	1	179	16.8	5	IGY
SMLJ100CA	100	111	123	1	162	18.6	5	IGZ
SMLJ110C	110	122	149.0	1	196	15.4	5	IHD
SMLJ110CA	110	122	135.0	1	177	16.8	5	IHE
SMLJ120C	120	133	163	1	214	14.0	5	IHF
SMLJ120CA	120	133	147	1	193	15.6	5	IHG

# SMCL5.0 THRU SMCL170CA

Electrical Characteristics @ 25°C Unless Otherwise Specified

MCC PART NUMBER	REVERSE STAND-OFF VOLTAGE $V_{WM}$	BREAKDOWN VOLTAGE $V_{(BR)} @ I_T$ (VOLTS)			MAXIMUM CLAMPING VOLTAGE @ $I_{PP}$	PEAK PULSE CURRENT $I_{PP}$	MAXIMUM REVERSE LEAKAGE @ $V_{WM}$ $I_b$	MARKING CODE
	VOLTS	MIN	MAX	$I_T$ (mA)	VOLTS	(AMPS)	(uA)	
SMLJ130C	130	144	176.0	1	231	13.0	5	IHH
SMLJ130CA	130	144	159.0	1	209	14.4	5	IHK
SMLJ150C	150	167	204.0	1	268	11.2	5	IHL
SMLJ150CA	150	167	185.0	1	243	12.4	5	IHM
SMLJ160C	160	178	218.0	1	287	10.4	5	IHN
SMLJ160CA	160	178	197.0	1	259	11.6	5	IHP
SMLJ170C	170	189	231.0	1	304	9.8	5	IHO
SMLJ170CA	170	189	209.0	1	275	11.0	5	IHR