



SANYO Semiconductors

DATA SHEET

15GN01NA

NPN Epitaxial Planar Silicon Transistor
**VHF to UHF Band High-Frequency Switching,
 High-Frequency General-Purpose Amplifier Applications**

Features

- Small ON-resistance [$R_{on}=2\Omega$ ($I_B=3mA$)].
- Small output capacitance [$C_{ob}=1.3pF$ ($V_{CB}=10V$)].

Specifications

Absolute Maximum Ratings at $T_a=25^\circ C$

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CBO}		15	V
Collector-to-Emitter Voltage	V_{CEO}		8	V
Emitter-to-Base Voltage	V_{EBO}		3	V
Collector Current	I_C		50	mA
Collector Dissipation	P_C		400	mW
Junction Temperature	T_j		150	$^\circ C$
Storage Temperature	T_{stg}		-55 to +150	$^\circ C$

Electrical Characteristics at $T_a=25^\circ C$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	$V_{CB}=10V, I_E=0A$			0.5	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB}=2V, I_C=0A$			0.5	μA
DC Current Gain	h_{FE}	$V_{CE}=5V, I_C=10mA$	200		400	
Gain-Bandwidth Product	f_T	$V_{CE}=5V, I_C=10mA$	1.0	1.5		GHz
Output Capacitance	C_{ob}	$V_{CB}=10V, f=1MHz$		1.3		pF
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=20mA, I_B=2mA$		0.06	0.12	V
Base-to-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=20mA, I_B=2mA$		0.85	1.0	V
Output ON resistance	R_{on}	$I_B=3mA, f=10kHz$		2.0		Ω

Marking : ZA

■ Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications of our customer who is considering such use and/or outside the scope of our intended standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.


■ Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

SANYO Semiconductor Co., Ltd.

www.semiconductor-sanyo.com/network






Package Dimensions







unit : mm (typ)
7522-003

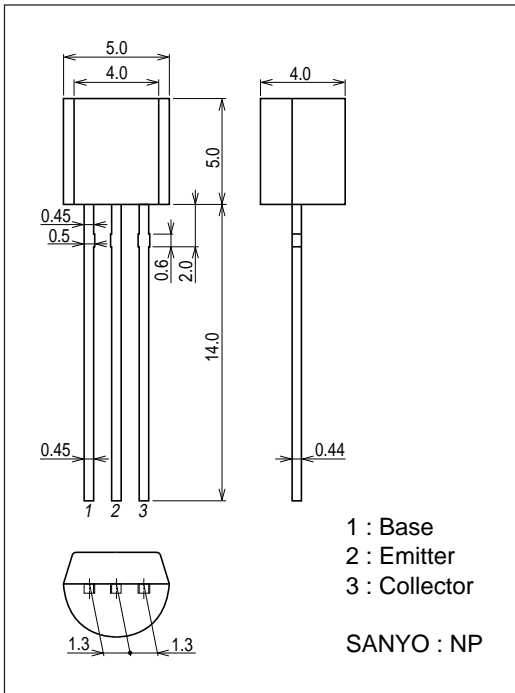

Marking

www.DataSheet4U.com

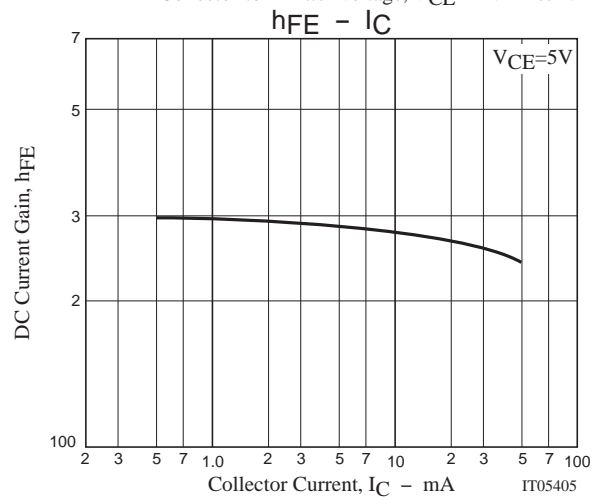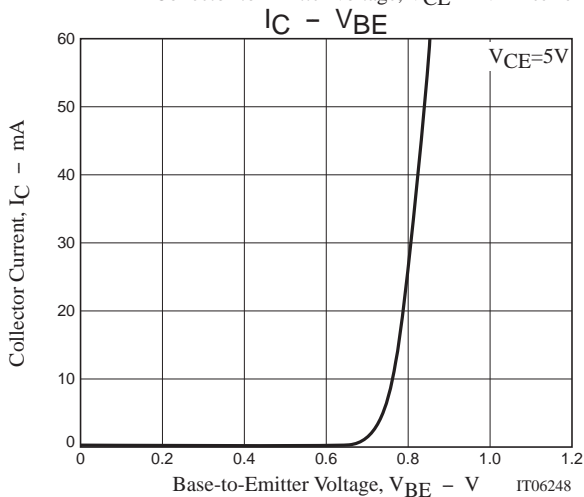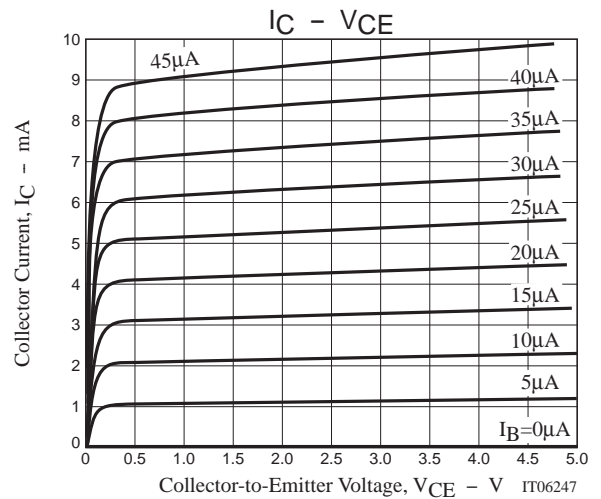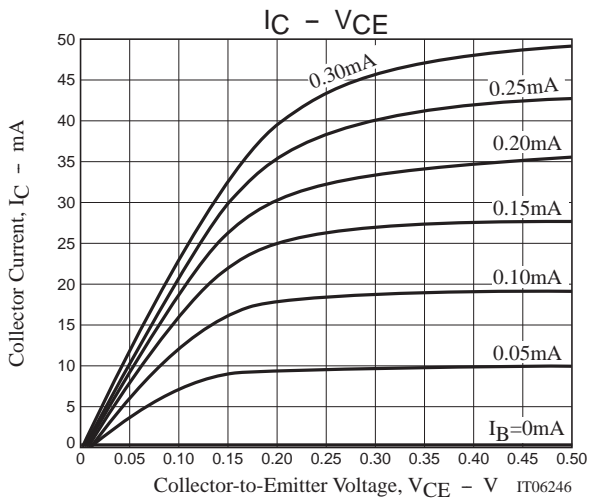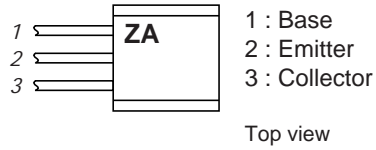

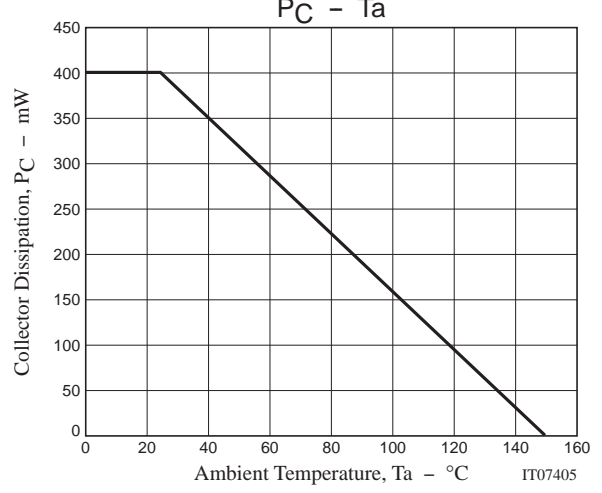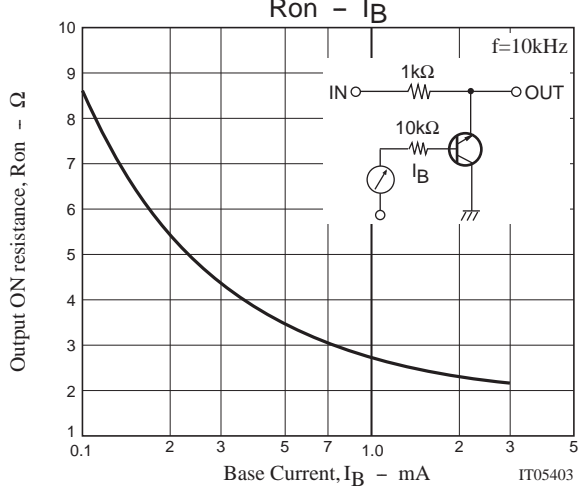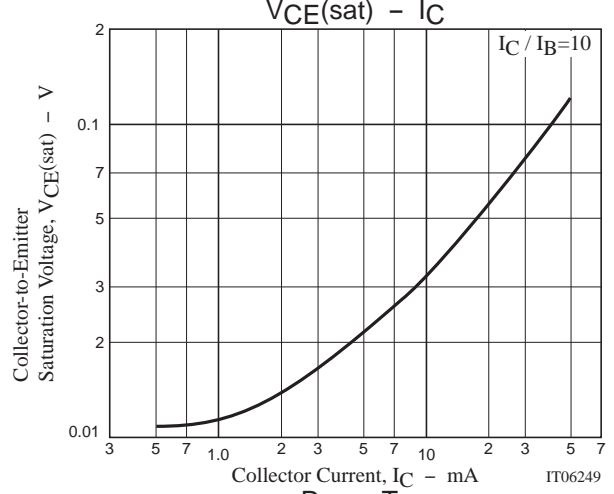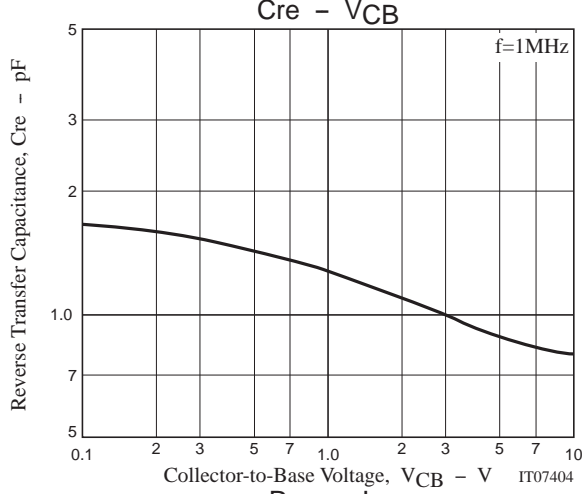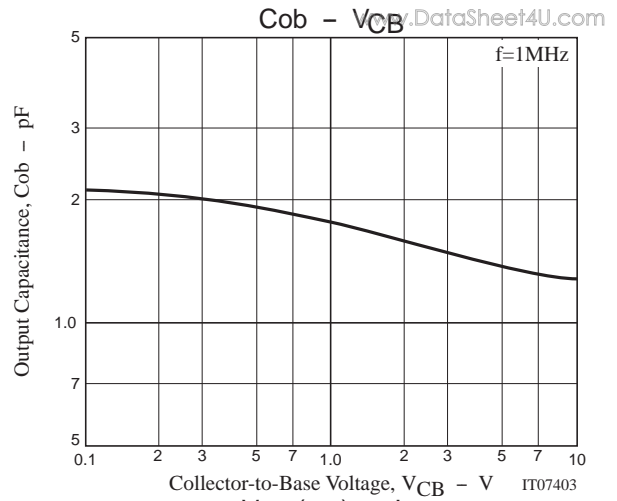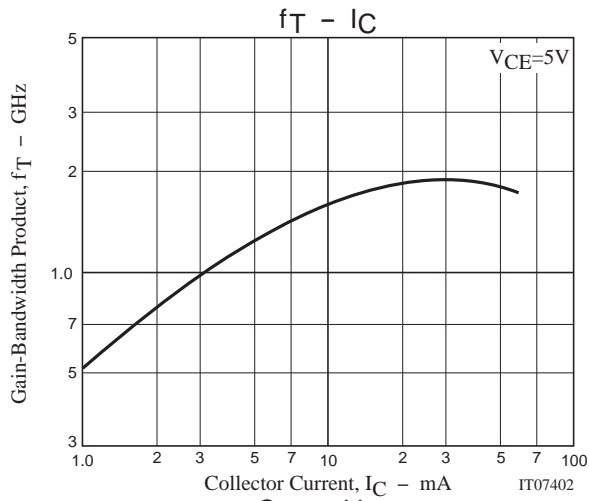

15GN01NA

S Parameters (Common emitter)

www.DataSheet4U.com

V_{CE}=5V, I_C=5mA, Z_O=50Ω

Freq(MHz)	S ₁₁	∠S ₁₁	S ₂₁	∠S ₂₁	S ₁₂	∠S ₁₂	S ₂₂	∠S ₂₂
100	0.679	-22.58	4.139	116.73	0.032	73.31	0.753	-12.33
200	0.580	-32.46	2.688	103.88	0.061	70.84	0.727	-16.89
300	0.499	-42.23	2.117	92.82	0.087	66.96	0.703	-22.87
400	0.424	-51.43	1.807	81.91	0.111	62.96	0.682	-28.63
500	0.349	-61.62	1.615	70.91	0.135	58.65	0.660	-35.63
600	0.262	-71.70	1.468	60.67	0.158	54.60	0.629	-42.07
700	0.192	-84.86	1.372	50.52	0.181	51.41	0.605	-48.82
800	0.118	-108.67	1.295	39.92	0.205	47.69	0.571	-57.87
900	0.073	-160.50	1.241	29.90	0.231	44.42	0.539	-66.04
1000	0.103	145.75	1.176	19.87	0.258	40.51	0.508	-76.99

V_{CE}=5V, I_C=10mA, Z_O=50Ω

Freq(MHz)	S ₁₁	∠S ₁₁	S ₂₁	∠S ₂₁	S ₁₂	∠S ₁₂	S ₂₂	∠S ₂₂
100	0.609	-25.35	5.809	112.60	0.031	75.01	0.685	-12.89
200	0.501	-36.26	3.667	99.43	0.058	72.48	0.659	-16.87
300	0.414	-46.23	2.800	87.86	0.084	69.11	0.635	-22.47
400	0.335	-55.33	2.316	76.81	0.109	65.86	0.615	-27.84
500	0.260	-65.69	2.015	66.02	0.134	61.84	0.595	-34.52
600	0.177	-76.44	1.787	56.16	0.159	57.57	0.564	-40.75
700	0.114	-92.81	1.635	46.31	0.184	54.11	0.540	-47.33
800	0.058	-140.97	1.517	36.10	0.212	49.91	0.505	-56.20
900	0.077	143.92	1.431	26.37	0.240	45.96	0.471	-64.20
1000	0.138	119.67	1.339	16.71	0.269	41.37	0.437	-75.11

V_{CE}=5V, I_C=20mA, Z_O=50Ω

Freq(MHz)	S ₁₁	∠S ₁₁	S ₂₁	∠S ₂₁	S ₁₂	∠S ₁₂	S ₂₂	∠S ₂₂
100	0.527	-29.52	7.559	108.11	0.030	76.02	0.623	-12.91
200	0.410	-41.38	4.581	93.88	0.057	74.93	0.600	-16.23
300	0.321	-51.81	3.369	81.99	0.083	71.96	0.580	-21.57
400	0.243	-61.31	2.711	70.96	0.109	68.01	0.563	-26.84
500	0.172	-73.24	2.304	60.45	0.135	63.89	0.545	-33.46
600	0.095	-90.10	2.005	50.91	0.162	59.42	0.515	-39.60
700	0.047	-132.96	1.802	41.36	0.189	55.50	0.491	-46.17
800	0.070	143.26	1.650	31.52	0.219	50.95	0.455	-55.15
900	0.135	116.79	1.535	22.05	0.249	46.42	0.418	-63.06
1000	0.198	106.08	1.422	12.75	0.279	41.29	0.382	-74.27

V_{CE}=5V, I_C=30mA, Z_O=50Ω

Freq(MHz)	S ₁₁	∠S ₁₁	S ₂₁	∠S ₂₁	S ₁₂	∠S ₁₂	S ₂₂	∠S ₂₂
100	0.472	-32.94	8.468	104.99	0.029	78.19	0.591	-12.70
200	0.352	-45.65	4.970	90.19	0.056	76.06	0.572	-15.72
300	0.263	-56.94	3.580	78.26	0.083	72.60	0.554	-21.08
400	0.187	-68.09	2.838	67.30	0.110	68.99	0.539	-26.31
500	0.119	-84.10	2.386	56.82	0.136	65.03	0.522	-32.99
600	0.053	-121.65	2.056	47.51	0.164	60.04	0.492	-39.20
700	0.053	160.07	1.832	38.08	0.193	55.97	0.467	-45.88
800	0.115	124.21	1.664	28.36	0.223	50.92	0.430	-54.94
900	0.182	109.00	1.537	19.11	0.254	46.26	0.391	-62.99
1000	0.244	100.79	1.417	9.97	0.284	40.99	0.354	-74.28

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of October, 2009. Specifications and information herein are subject to change without notice.